

RF Power Field Effect Transistors

N-Channel Enhancement-Mode Lateral MOSFETs

Designed for W-CDMA and LTE base station applications with frequencies from 2110 to 2170 MHz. Can be used in Class AB and Class C for all typical cellular base station modulation formats.

- Typical Single-Carrier W-CDMA Performance: $V_{DD} = 28$ Volts, $I_{DQ} = 700$ mA, $P_{out} = 24$ Watts Avg., IQ Magnitude Clipping, Channel Bandwidth = 3.84 MHz, Input Signal PAR = 7.5 dB @ 0.01% Probability on CCDF.

| Frequency | G_{ps} (dB) | η_D (%) | Output PAR (dB) | ACPR (dBc) |
|-----------|---------------|--------------|-----------------|------------|
| 2110 MHz | 17.9 | 33.0 | 6.4 | -38.7 |
| 2140 MHz | 18.1 | 33.0 | 6.4 | -38.2 |
| 2170 MHz | 18.3 | 33.4 | 6.3 | -37.2 |


- Capable of Handling 10:1 VSWR, @ 32 Vdc, 2140 MHz, 138 Watts CW ⁽¹⁾ Output Power (3 dB Input Overdrive from Rated P_{out})
- Typical P_{out} @ 1 dB Compression Point \approx 100 Watts CW

Features


- 100% PAR Tested for Guaranteed Output Power Capability
- Characterized with Series Equivalent Large-Signal Impedance Parameters and Common Source S-Parameters
- Internally Matched for Ease of Use
- Integrated ESD Protection
- Greater Negative Gate-Source Voltage Range for Improved Class C Operation
- Designed for Digital Predistortion Error Correction Systems
- Optimized for Doherty Applications
- RoHS Compliant
- In Tape and Reel. R3 Suffix = 250 Units, 56 mm Tape Width, 13 inch Reel. For R5 Tape and Reel option, see p. 14.

MRF8S21100HR3
MRF8S21100HSR3

2110-2170 MHz, 24 W AVG., 28 V
W-CDMA, LTE
LATERAL N-CHANNEL
RF POWER MOSFETs



CASE 465-06, STYLE 1
NI-780
MRF8S21100HR3



CASE 465A-06, STYLE 1
NI-780S
MRF8S21100HSR3

Table 1. Maximum Ratings

| Rating | Symbol | Value | Unit |
|--|-----------|-------------|-----------|
| Drain-Source Voltage | V_{DSS} | -0.5, +65 | Vdc |
| Gate-Source Voltage | V_{GS} | -6.0, +10 | Vdc |
| Operating Voltage | V_{DD} | 32, +0 | Vdc |
| Storage Temperature Range | T_{stg} | -65 to +150 | °C |
| Case Operating Temperature | T_C | 150 | °C |
| Operating Junction Temperature ^(2,3) | T_J | 225 | °C |
| CW Operation @ $T_C = 25^\circ\text{C}$ Derate above 25°C | CW | 108 0.57 | W W/°C |

Table 2. Thermal Characteristics

| Characteristic | Symbol | Value ^(3,4) | Unit |
|---|-----------------|------------------------|------|
| Thermal Resistance, Junction to Case Case Temperature 77°C, 24 W CW, 28 Vdc, $I_{DQ} = 700$ mA, 2140 MHz Case Temperature 80°C, 100 W CW ⁽¹⁾ , 28 Vdc, $I_{DQ} = 700$ mA, 2140 MHz | $R_{\theta JC}$ | 0.48 0.45 | °C/W |

1. Exceeds recommended operating conditions. See CW operation data in Maximum Ratings table.
2. Continuous use at maximum temperature will affect MTTF.
3. MTTF calculator available at <http://www.freescale.com/rf>. Select Software & Tools/Development Tools/Calculators to access MTTF calculators by product.
4. Refer to AN1955, *Thermal Measurement Methodology of RF Power Amplifiers*. Go to <http://www.freescale.com/rf>. Select Documentation/Application Notes - AN1955.

Table 3. ESD Protection Characteristics

| Test Methodology | Class |
|---------------------------------------|--------------|
| Human Body Model (per JESD22-A114) | 2 (Minimum) |
| Machine Model (per EIA/JESD22-A115) | A (Minimum) |
| Charge Device Model (per JESD22-C101) | IV (Minimum) |

Table 4. Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|----------------|--------|-----|-----|-----|------|
|----------------|--------|-----|-----|-----|------|

Off Characteristics

| | | | | | |
|---|-----------|---|---|----|-----------------|
| Zero Gate Voltage Drain Leakage Current ($V_{DS} = 65\text{ Vdc}$, $V_{GS} = 0\text{ Vdc}$) | I_{DSS} | — | — | 10 | μAdc |
| Zero Gate Voltage Drain Leakage Current ($V_{DS} = 28\text{ Vdc}$, $V_{GS} = 0\text{ Vdc}$) | I_{DSS} | — | — | 1 | μAdc |
| Gate-Source Leakage Current ($V_{GS} = 5\text{ Vdc}$, $V_{DS} = 0\text{ Vdc}$) | I_{GSS} | — | — | 1 | μAdc |

On Characteristics

| | | | | | |
|---|--------------|-----|------|-----|-----|
| Gate Threshold Voltage ($V_{DS} = 10\text{ Vdc}$, $I_D = 150\ \mu\text{Adc}$) | $V_{GS(th)}$ | 1.2 | 2.0 | 2.7 | Vdc |
| Gate Quiescent Voltage ($V_{DS} = 28\text{ Vdc}$, $I_D = 700\ \text{mAdc}$) | $V_{GS(Q)}$ | — | 2.7 | — | Vdc |
| Fixture Gate Quiescent Voltage ⁽¹⁾ ($V_{DD} = 28\text{ Vdc}$, $I_D = 700\ \text{mAdc}$, Measured in Functional Test) | $V_{GG(Q)}$ | 4.0 | 5.4 | 7.0 | Vdc |
| Drain-Source On-Voltage ($V_{GS} = 10\text{ Vdc}$, $I_D = 1.5\ \text{Adc}$) | $V_{DS(on)}$ | 0.1 | 0.24 | 0.3 | Vdc |

Functional Tests ⁽²⁾ (In Freescale Test Fixture, 50 ohm system) $V_{DD} = 28\text{ Vdc}$, $I_{DQ} = 700\ \text{mA}$, $P_{out} = 24\ \text{W Avg.}$, $f = 2170\ \text{MHz}$, Single-Carrier W-CDMA, IQ Magnitude Clipping, Input Signal PAR = 7.5 dB @ 0.01% Probability on CCDF. ACPR measured in 3.84 MHz Channel Bandwidth @ $\pm 5\ \text{MHz}$ Offset.

| | | | | | |
|--|----------|------|-------|-------|-----|
| Power Gain | G_{ps} | 17.2 | 18.3 | 20.2 | dB |
| Drain Efficiency | η_D | 31.0 | 33.4 | — | % |
| Output Peak-to-Average Ratio @ 0.01% Probability on CCDF | PAR | 5.9 | 6.3 | — | dB |
| Adjacent Channel Power Ratio | ACPR | — | -37.2 | -36.0 | dBc |
| Input Return Loss | IRL | — | -12 | -7 | dB |

Typical Broadband Performance (In Freescale Test Fixture, 50 ohm system) $V_{DD} = 28\text{ Vdc}$, $I_{DQ} = 700\ \text{mA}$, $P_{out} = 24\ \text{W Avg.}$, Single-Carrier W-CDMA, IQ Magnitude Clipping, Input Signal PAR = 7.5 dB @ 0.01% Probability on CCDF. ACPR measured in 3.84 MHz Channel Bandwidth @ $\pm 5\ \text{MHz}$ Offset.

| Frequency | G_{ps} (dB) | η_D (%) | Output PAR (dB) | ACPR (dBc) | IRL (dB) |
|-----------|------------------|-----------------|--------------------|---------------|-------------|
| 2110 MHz | 17.9 | 33.0 | 6.4 | -38.7 | -18 |
| 2140 MHz | 18.1 | 33.0 | 6.4 | -38.2 | -16 |
| 2170 MHz | 18.3 | 33.4 | 6.3 | -37.2 | -12 |

- $V_{GG} = 2 \times V_{GS(Q)}$. Parameter measured on Freescale Test Fixture, due to resistive divider network on the board. Refer to Test Circuit schematic.
- Part internally matched both on input and output.

(continued)

Table 4. Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted) (continued)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|---|--------------------|-----|-------|-----|----------------------|
| Typical Performance (In Freescale Test Fixture, 50 ohm system) $V_{DD} = 28$ Vdc, $I_{DQ} = 700$ mA, 2110-2170 MHz Bandwidth | | | | | |
| P_{out} @ 1 dB Compression Point, CW | P1dB | — | 100 | — | W |
| IMD Symmetry @ 36 W PEP, P_{out} where IMD Third Order Intermodulation $\cong 30$ dBc (Delta IMD Third Order Intermodulation between Upper and Lower Sidebands > 2 dB) | IMD _{sym} | — | 40 | — | MHz |
| VBW Resonance Point (IMD Third Order Intermodulation Inflection Point) | VBW _{res} | — | 50 | — | MHz |
| Gain Flatness in 60 MHz Bandwidth @ $P_{out} = 24$ W Avg. | G_F | — | 0.4 | — | dB |
| Gain Variation over Temperature (-30°C to $+80^\circ\text{C}$) | ΔG | — | 0.011 | — | dB/ $^\circ\text{C}$ |
| Output Power Variation over Temperature (-30°C to $+80^\circ\text{C}$) (1) | $\Delta P1dB$ | — | 0.005 | — | dB/ $^\circ\text{C}$ |

1. Exceeds recommended operating conditions. See CW operation data in Maximum Ratings table.

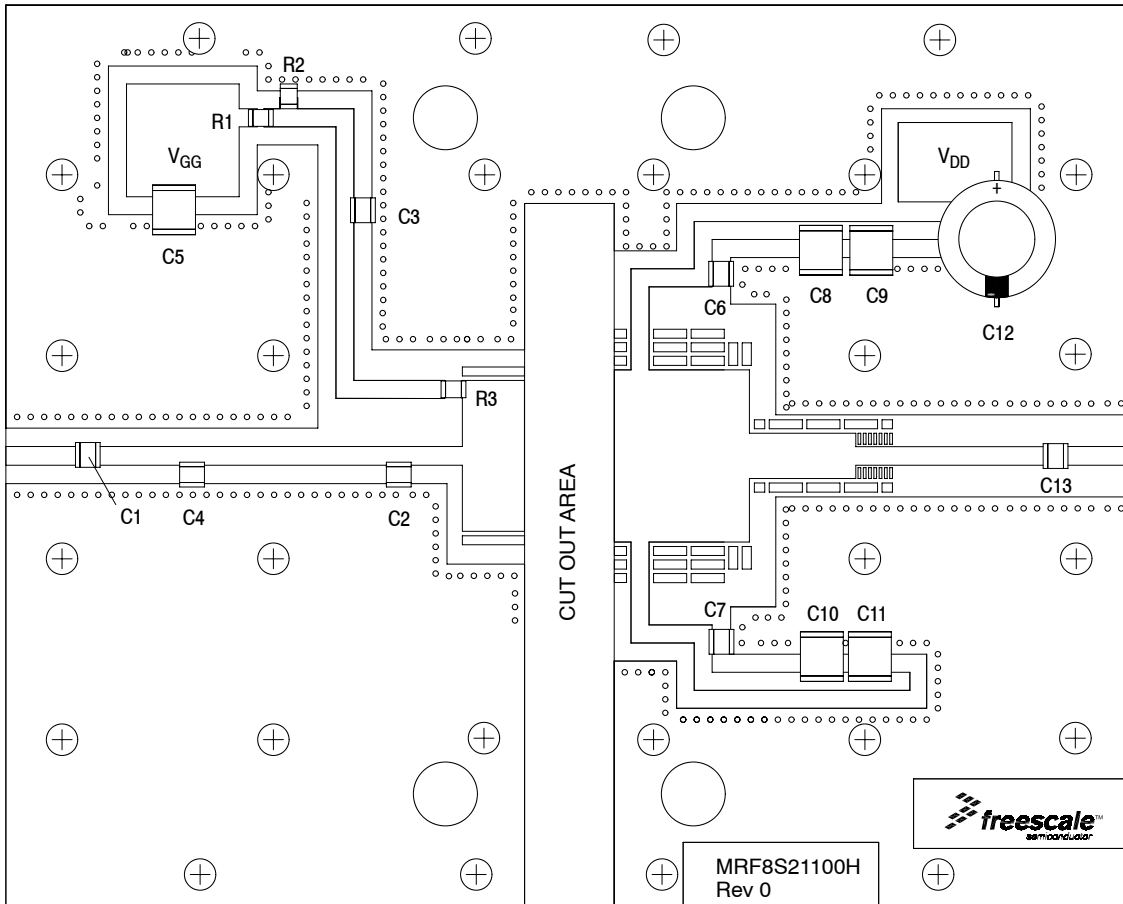


Figure 1. MRF8S21100HR3(HSR3) Test Circuit Component Layout

Table 5. MRF8S21100HR3(HSR3) Test Circuit Component Designations and Values

| Part | Description | Part Number | Manufacturer |
|----------------------|--|-------------------|--------------------|
| C1, C3, C6, C7 | 6.8 pF Chip Capacitors | ATC100B6R8CT500XT | ATC |
| C2 | 1.6 pF Chip Capacitor | ATC100B1R6BT500XT | ATC |
| C4 | 0.2 pF Chip Capacitor | ATC100B0R2BT500XT | ATC |
| C5, C8, C9, C10, C11 | 10 μ F, 50 V Tantalum Capacitors | 293D106X9050E2TE3 | Vishay |
| C12 | 220 μ F, 50 V Electrolytic Capacitor, Radial | 227CKS050M | Illinois Capacitor |
| C13 | 5.6 pF Chip Capacitor | ATC100B5R6CT500XT | ATC |
| R1, R2 | 2 K Ω , 1/4 W Chip Resistors | CRCW12062K00FKEA | Vishay |
| R3 | 10 Ω , 1/4 W Chip Resistor | CRCW120610R0JNEA | Vishay |
| PCB | 0.030", $\epsilon_r = 2.55$ | AD255A | Arlon |

TYPICAL CHARACTERISTICS

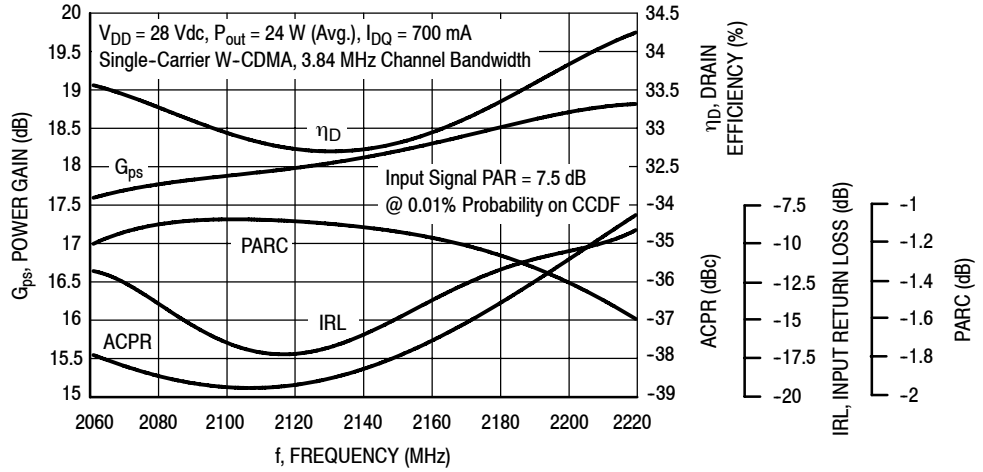


Figure 2. Output Peak-to-Average Ratio Compression (PARC) Broadband Performance @ $P_{out} = 24$ Watts Avg.

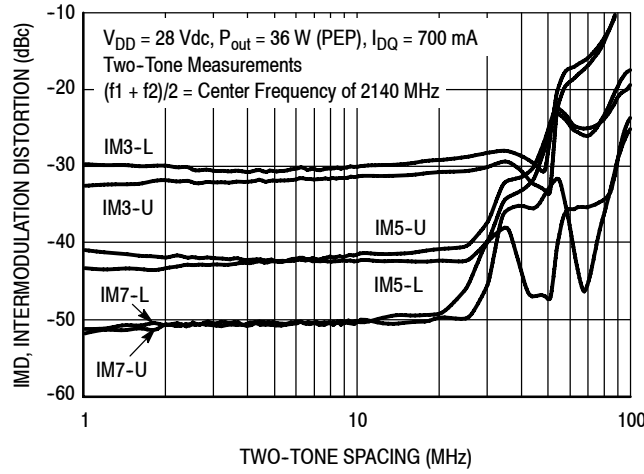


Figure 3. Intermodulation Distortion Products versus Two-Tone Spacing

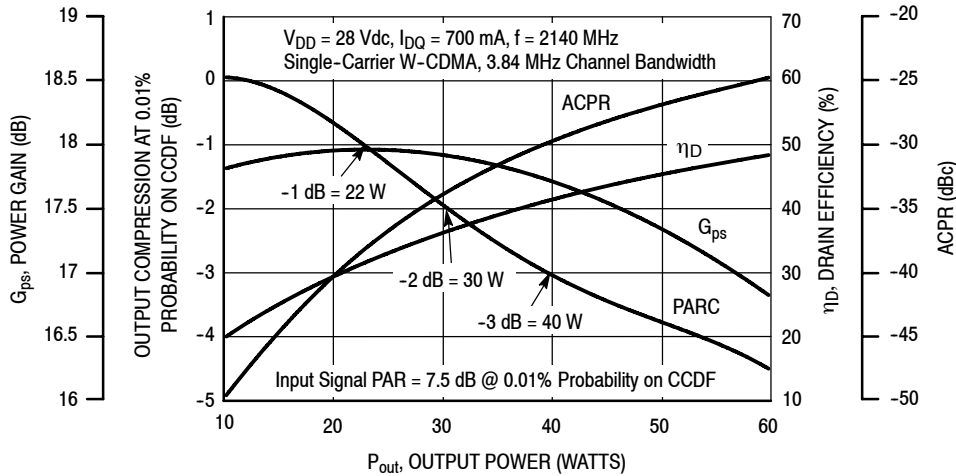


Figure 4. Output Peak-to-Average Ratio Compression (PARC) versus Output Power

TYPICAL CHARACTERISTICS

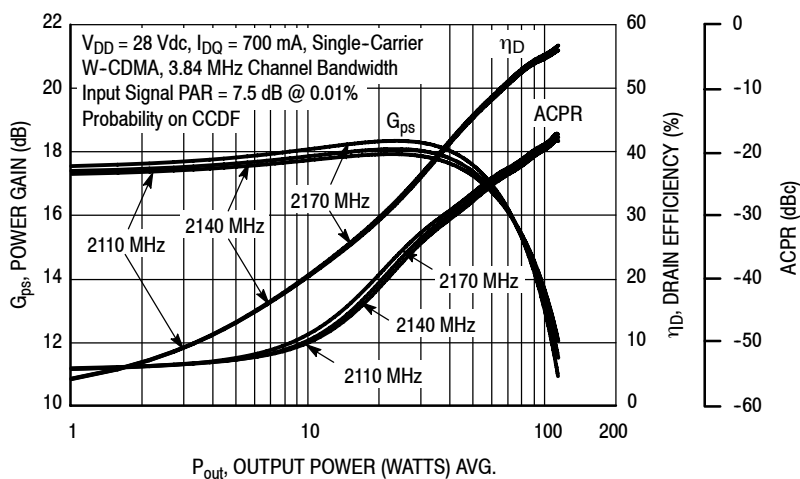


Figure 5. Single-Carrier W-CDMA Power Gain, Drain Efficiency and ACPR versus Output Power

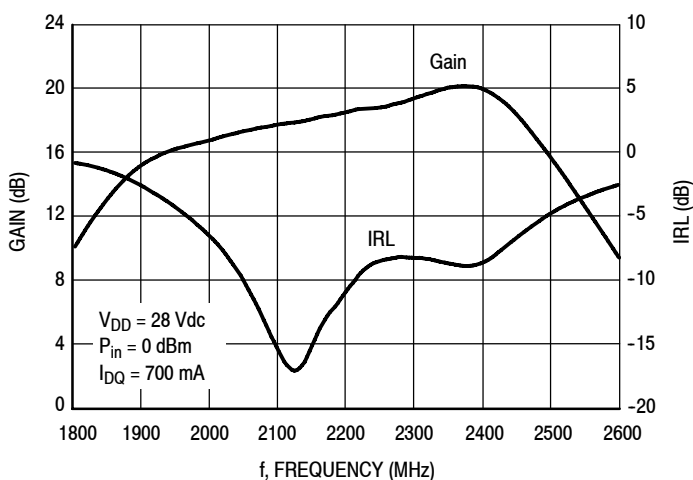


Figure 6. Broadband Frequency Response

W-CDMA TEST SIGNAL

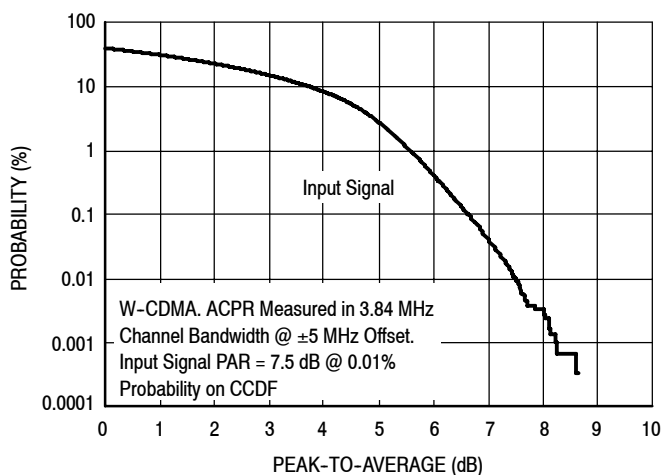


Figure 7. CCDF W-CDMA IQ Magnitude Clipping, Single-Carrier Test Signal

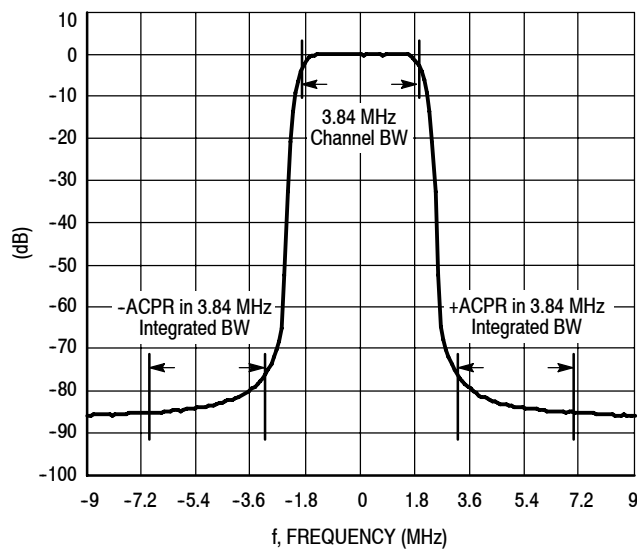


Figure 8. Single-Carrier W-CDMA Spectrum

$V_{DD} = 28 \text{ Vdc}$, $I_{DQ} = 700 \text{ mA}$, $P_{out} = 24 \text{ W Avg.}$

| f MHz | Z_{source} Ω | Z_{load} Ω |
|----------|--------------------------|------------------------|
| 2060 | 4.41 - j6.05 | 3.03 - j3.64 |
| 2080 | 4.38 - j5.67 | 2.96 - j3.45 |
| 2100 | 4.33 - j5.29 | 2.89 - j3.26 |
| 2120 | 4.33 - j4.91 | 2.83 - j3.10 |
| 2140 | 4.33 - j4.54 | 2.75 - j2.94 |
| 2160 | 4.33 - j4.17 | 2.69 - j2.75 |
| 2180 | 4.31 - j3.80 | 2.62 - j2.50 |
| 2200 | 4.32 - j3.39 | 2.65 - j2.24 |
| 2220 | 4.35 - j2.99 | 2.67 - j2.04 |

Z_{source} = Test circuit impedance as measured from gate to ground.

Z_{load} = Test circuit impedance as measured from drain to ground.


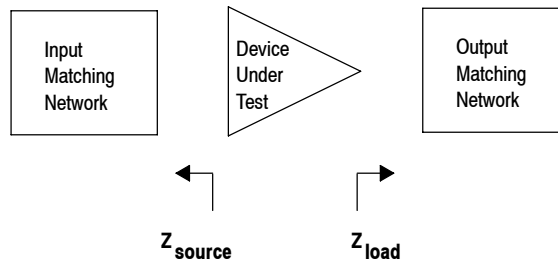


Figure 9. Series Equivalent Source and Load Impedance

ALTERNATIVE PEAK TUNE LOAD PULL CHARACTERISTICS

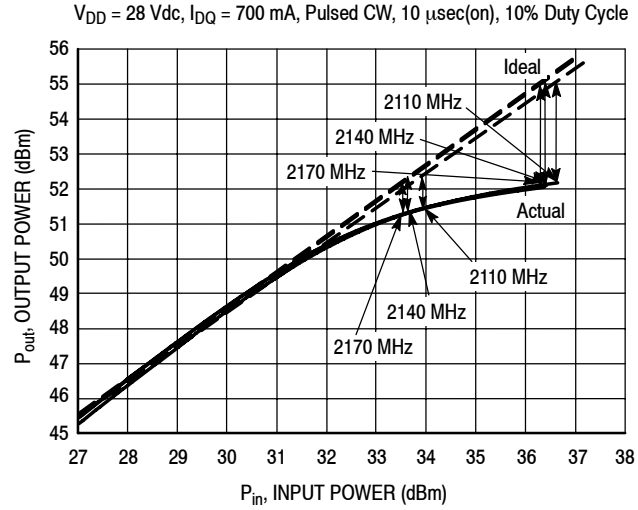

NOTE: Load Pull Test Fixture Tuned for Peak P1dB Output Power @ 28 V



| f (MHz) | P1dB | | P3dB | |
|------------|-------|------|-------|------|
| | Watts | dBm | Watts | dBm |
| 2110 | 141 | 51.5 | 166 | 52.2 |
| 2140 | 141 | 51.5 | 162 | 52.1 |
| 2170 | 138 | 51.4 | 158 | 52.0 |

Test Impedances per Compression Level

| f (MHz) | | Z_{source} Ω | Z_{load} Ω |
|------------|------|--------------------------|------------------------|
| 2110 | P1dB | 3.50 - j7.47 | 1.65 - j3.64 |
| 2140 | P1dB | 4.21 - j7.53 | 1.57 - j3.70 |
| 2170 | P1dB | 6.39 - j8.09 | 1.66 - j3.68 |

Figure 10. Pulsed CW Output Power versus Input Power @ 28 V

PACKAGE DIMENSIONS

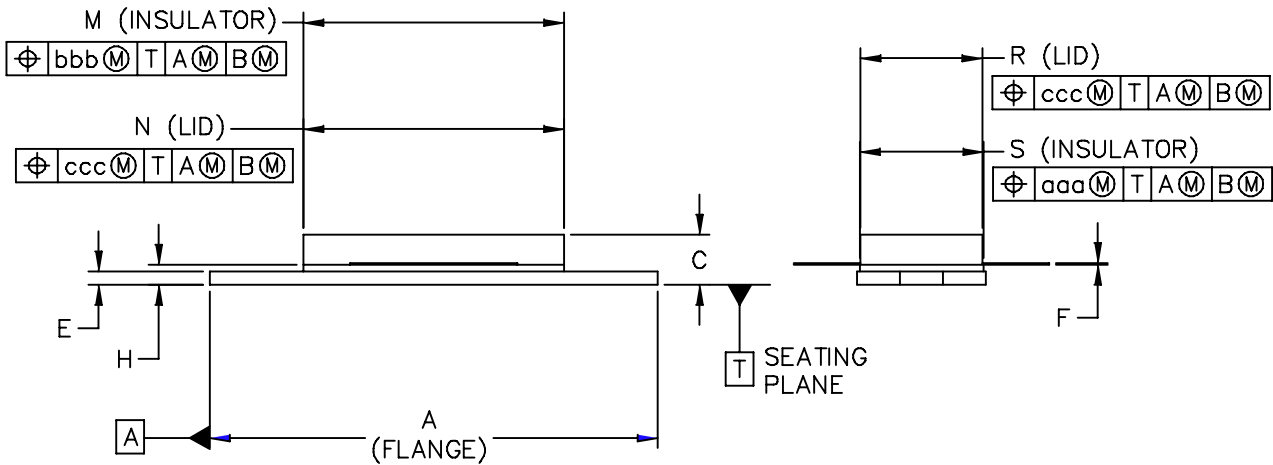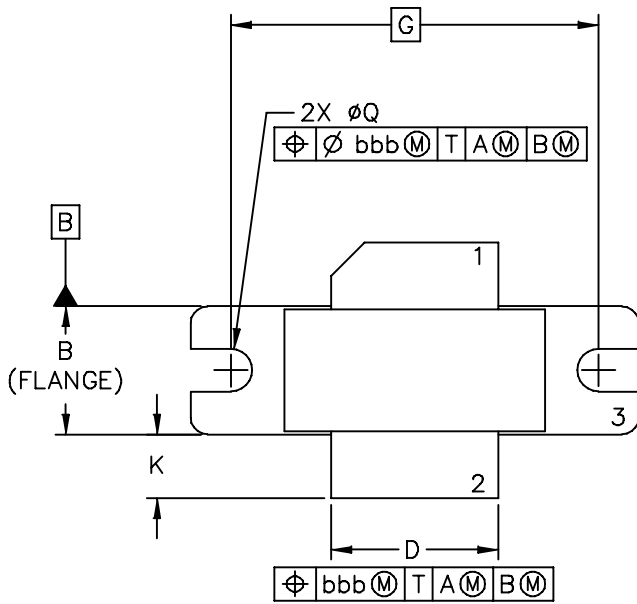

| | | | |
|---|--------------------------|--------------------|----------------------------|
| © FREESCALE SEMICONDUCTOR, INC. ALL RIGHTS RESERVED. | | MECHANICAL OUTLINE | PRINT VERSION NOT TO SCALE |
| TITLE: NI-780 | DOCUMENT NO: 98ASB15607C | | REV: G |
| | CASE NUMBER: 465-06 | | 31 MAR 2005 |
| | STANDARD: NON-JEDEC | | |



NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1994.
2. CONTROLLING DIMENSION: INCH.
3. DELETED
4. DIMENSION H IS MEASURED .030 (.762) AWAY FROM PACKAGE BODY.

STYLE 1:

- PIN 1. DRAIN
 2. GATE
 3. SOURCE

| DIM | INCH | | MILLIMETER | | DIM | INCH | | MILLIMETER | |
|---|-----------|-------|--------------------|-------|--------------------------|----------------------------|------|-------------|-------|
| | MIN | MAX | MIN | MAX | | MIN | MAX | MIN | MAX |
| A | 1.335 | 1.345 | 33.91 | 34.16 | R | .365 | .375 | 9.27 | 9.53 |
| B | .380 | .390 | 9.65 | 9.91 | S | .365 | .375 | 9.27 | 9.52 |
| C | .125 | .170 | 3.18 | 4.32 | aaa | — | .005 | — | 0.127 |
| D | .495 | .505 | 12.57 | 12.83 | bbb | — | .010 | — | 0.254 |
| E | .035 | .045 | 0.89 | 1.14 | ccc | — | .015 | — | 0.381 |
| F | .003 | .006 | 0.08 | 0.15 | — | — | — | — | — |
| G | 1.100 BSC | | 27.94 BSC | | — | — | — | — | — |
| H | .057 | .067 | 1.45 | 1.7 | — | — | — | — | — |
| K | .170 | .210 | 4.32 | 5.33 | — | — | — | — | — |
| M | .774 | .786 | 19.66 | 19.96 | — | — | — | — | — |
| N | .772 | .788 | 19.6 | 20 | — | — | — | — | — |
| Q | ∅.118 | ∅.138 | ∅3 | ∅3.51 | — | — | — | — | — |
| © FREESCALE SEMICONDUCTOR, INC. ALL RIGHTS RESERVED. | | | MECHANICAL OUTLINE | | | PRINT VERSION NOT TO SCALE | | | |
| TITLE: NI-780 | | | | | DOCUMENT NO: 98ASB15607C | | | REV: G | |
| | | | | | CASE NUMBER: 465-06 | | | 31 MAR 2005 | |
| | | | | | STANDARD: NON-JEDEC | | | | |

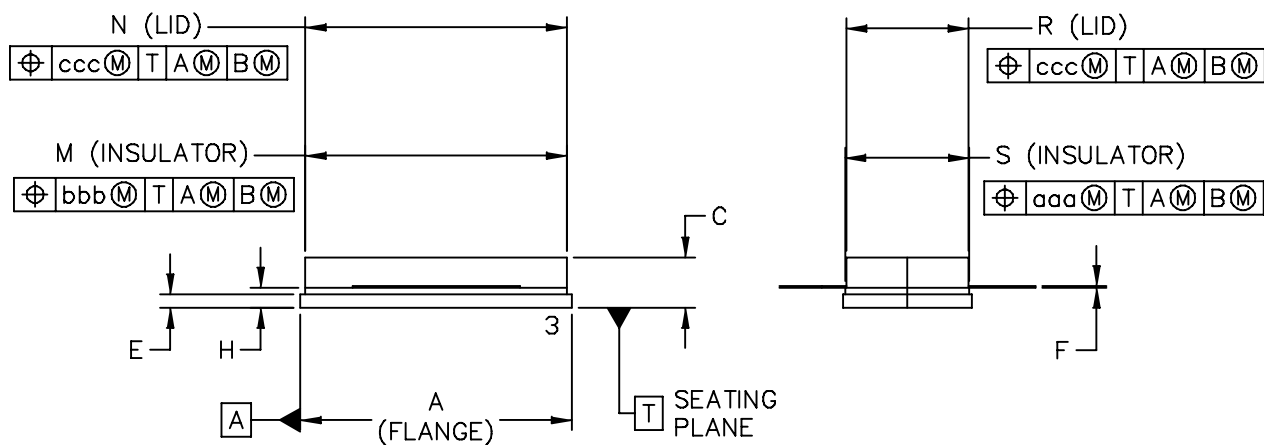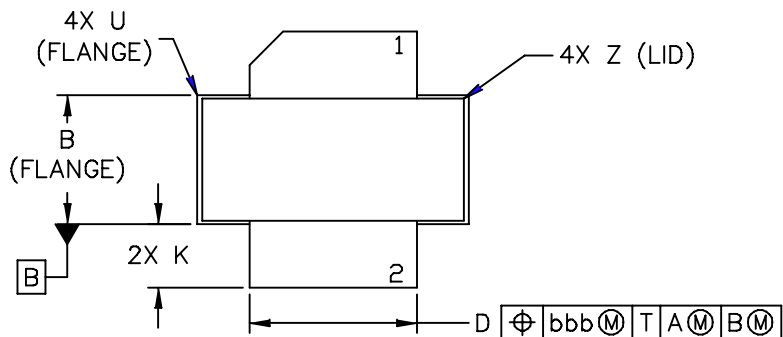

| | | | |
|---|--------------------------|----------------------------|--|
| © FREESCALE SEMICONDUCTOR, INC. ALL RIGHTS RESERVED. | MECHANICAL OUTLINE | PRINT VERSION NOT TO SCALE | |
| TITLE: NI-780S | DOCUMENT NO: 98ASB16718C | REV: H | |
| | CASE NUMBER: 465A-06 | 31 MAR 2005 | |
| | STANDARD: NON-JEDEC | | |

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1994.
2. CONTROLLING DIMENSION: INCH.
3. DELETED
4. DIMENSION H IS MEASURED .030 (0.762) AWAY FROM PACKAGE BODY.

STYLE 1:

- PIN 1. DRAIN
2. GATE
3. SOURCE

| DIM | INCH | | MILLIMETER | | DIM | INCH | | MILLIMETER | |
|-----|------|-------|------------|-------|-----|-------|-----|------------|-------|
| | MIN | MAX | MIN | MAX | | MIN | MAX | MIN | MAX |
| A | .805 | -.815 | 20.45 | 20.7 | U | -.040 | - | - | 1.02 |
| B | .380 | -.390 | 9.65 | 9.91 | Z | -.030 | - | - | 0.76 |
| C | .125 | -.170 | 3.18 | 4.32 | aaa | -.005 | - | - | 0.127 |
| D | .495 | -.505 | 12.57 | 12.83 | bbb | -.010 | - | - | 0.254 |
| E | .035 | -.045 | 0.89 | 1.14 | ccc | -.015 | - | - | 0.381 |
| F | .003 | -.006 | 0.08 | 0.15 | - | - | - | - | - |
| H | .057 | -.067 | 1.45 | 1.7 | - | - | - | - | - |
| K | .170 | -.210 | 4.32 | 5.33 | - | - | - | - | - |
| M | .774 | -.786 | 19.61 | 20.02 | - | - | - | - | - |
| N | .772 | -.788 | 19.61 | 20.02 | - | - | - | - | - |
| R | .365 | -.375 | 9.27 | 9.53 | - | - | - | - | - |
| S | .365 | -.375 | 9.27 | 9.52 | - | - | - | - | - |

| | | | | | |
|---|--|--------------------------|--|----------------------------|--|
| © FREESCALE SEMICONDUCTOR, INC. ALL RIGHTS RESERVED. | | MECHANICAL OUTLINE | | PRINT VERSION NOT TO SCALE | |
| TITLE: NI-780S | | DOCUMENT NO: 98ASB16718C | | REV: H | |
| | | CASE NUMBER: 465A-06 | | 31 MAR 2005 | |
| | | STANDARD: NON-JEDEC | | | |

PRODUCT DOCUMENTATION AND SOFTWARE

Refer to the following documents, tools and software to aid your design process.

Application Notes

- AN1955: Thermal Measurement Methodology of RF Power Amplifiers

Engineering Bulletins

- EB212: Using Data Sheet Impedances for RF LDMOS Devices

Software

- Electromigration MTTF Calculator
- RF High Power Model
- .s2p File

For Software, do a Part Number search at <http://www.freescale.com>, and select the “Part Number” link. Go to the Software & Tools tab on the part’s Product Summary page to download the respective tool.

R5 TAPE AND REEL OPTION

R5 Suffix = 50 Units, 56 mm Tape Width, 13 inch Reel.

The R5 tape and reel option for MRF8S21100H and MRF8S21100HS parts will be available for 2 years after release of MRF8S21100H and MRF8S21100HS. Freescale Semiconductor, Inc. reserves the right to limit the quantities that will be delivered in the R5 tape and reel option. At the end of the 2 year period customers who have purchased these devices in the R5 tape and reel option will be offered MRF8S21100H and MRF8S21100HS in the R3 tape and reel option.

REVISION HISTORY

The following table summarizes revisions to this document.

| Revision | Date | Description |
|----------|-----------|---|
| 0 | Oct. 2010 | • Initial Release of Data Sheet |
| 1 | Mar. 2011 | • Corrected $V_{GG(Q)} V_{DD}$ value from 30 Vdc to 28 Vdc in On Characteristics table to reflect actual test measurement condition, p. 2 |

How to Reach Us:

Home Page:

www.freescale.com

Web Support:

<http://www.freescale.com/support>

USA/Europe or Locations Not Listed:

Freescale Semiconductor, Inc.
Technical Information Center, EL516
2100 East Elliot Road
Tempe, Arizona 85284
1-800-521-6274 or +1-480-768-2130
www.freescale.com/support

Europe, Middle East, and Africa:

Freescale Halbleiter Deutschland GmbH
Technical Information Center
Schatzbogen 7
81829 Muenchen, Germany
+44 1296 380 456 (English)
+46 8 52200080 (English)
+49 89 92103 559 (German)
+33 1 69 35 48 48 (French)
www.freescale.com/support

Japan:

Freescale Semiconductor Japan Ltd.
Headquarters
ARCO Tower 15F
1-8-1, Shimo-Meguro, Meguro-ku,
Tokyo 153-0064
Japan
0120 191014 or +81 3 5437 9125
support.japan@freescale.com

Asia/Pacific:

Freescale Semiconductor China Ltd.
Exchange Building 23F
No. 118 Jianguo Road
Chaoyang District
Beijing 100022
China
+86 10 5879 8000
support.asia@freescale.com

For Literature Requests Only:

Freescale Semiconductor Literature Distribution Center
1-800-441-2447 or +1-303-675-2140
Fax: +1-303-675-2150
LDCForFreescaleSemiconductor@hibbertgroup.com

Information in this document is provided solely to enable system and software implementers to use Freescale Semiconductor products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Freescale Semiconductor reserves the right to make changes without further notice to any products herein. Freescale Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Freescale Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in Freescale Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals", must be validated for each customer application by customer's technical experts. Freescale Semiconductor does not convey any license under its patent rights nor the rights of others. Freescale Semiconductor products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Freescale Semiconductor product could create a situation where personal injury or death may occur. Should Buyer purchase or use Freescale Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold Freescale Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Freescale Semiconductor was negligent regarding the design or manufacture of the part.

Freescale™ and the Freescale logo are trademarks of Freescale Semiconductor, Inc. All other product or service names are the property of their respective owners.

© Freescale Semiconductor, Inc. 2010-2011. All rights reserved.