

MABA-010125-TC1113



RF 1:1 Transmission Line Transformer 4.5-3000 MHz

Rev. V4


Features

- Surface mount
- Wide frequency range
- 1:1 impedance
- Lead Free
- RoHS* Compliant and is 260°C reflow compatible.
- Available on Tape and Reel, reel quantity 2000

Description

M/A-COM's MABA-010125-TC1113 is a RoHS compliant 1:1 RF transmission line transformer in a low cost, surface mount package. The windings of the MABA-010125-TC1113 are welded to the package substrate for improved reliability and to eliminate lead content. Ideally suited for high volume cellular and wireless application. Parts are packaged in tape & reel.


Schematic



Product Image




Case-style Dimensions

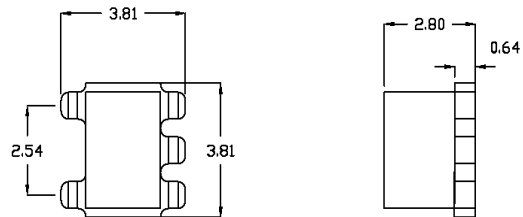

Pin Configuration

| Pin No. | Function |
|---------|---------------|
| 1 | Secondary Dot |
| 2 | Not Connected |
| 3 | Secondary |
| 4 | Primary |
| 5 | Primary Dot |

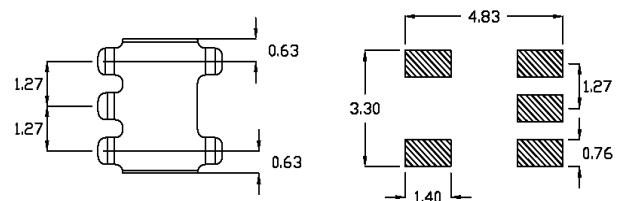

* Dimensions are inches (millimeters) ± 0.015 (0.38) unless otherwise specified.

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400
 • India Tel: +91.80.43537383 • China Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

MABA-010125-TC1113



RF 1:1 Transmission Line Transformer 4.5-3000 MHz

Rev. V4

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 50\Omega$

| Parameter | Test Conditions | Test Conditions | Units | Min | Typ | Max |
|---------------------|-----------------|-----------------|---------|-----|-----|-----|
| RF Frequency | - | 4.5 - 3000 | MHz | - | - | - |
| Insertion Loss | - | 4.5 - 1000 | dB | - | 0.3 | 1.0 |
| | | 1000 - 2000 | dB | - | 1.5 | 2.0 |
| | | 2000 - 3000 | dB | - | 2.8 | - |
| Amplitude Unbalance | - | 4.5 - 3000 | dB | - | 0.5 | 1.0 |
| Phase Unbalance | - | 4.5 - 3000 | Degrees | - | 5 | 20 |

Absolute Maximum Ratings ^{1,2}

| Parameter | Absolute Maximum |
|-----------------------|------------------|
| DC Power | 250 mW |
| DC Current | 50 mA |
| Operating Temperature | -40°C to +85°C |
| Storage Temperature | -55°C to +125°C |

1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. M/A-COM does not recommend sustained operation near these survivability limits.

MABA-010125-TC1113




RF 1:1 Transmission Line Transformer 4.5-3000 MHz


Rev. V4

Typical Performance Curves


Insertion Loss

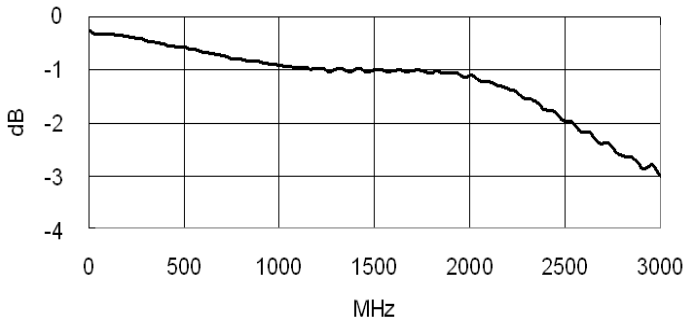


Amplitude Unbalance

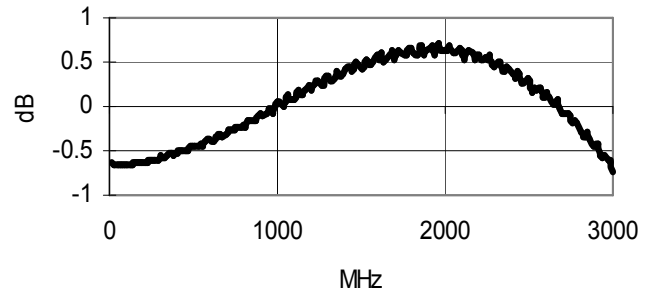

Phase Unbalance

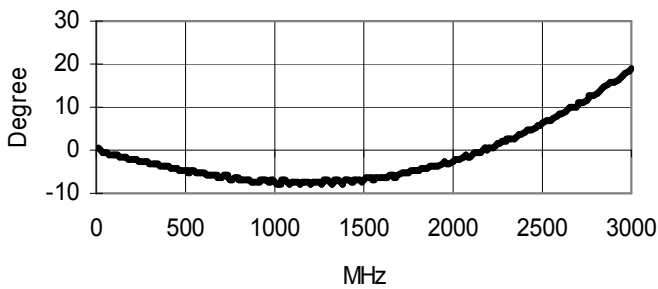

Input Return Loss

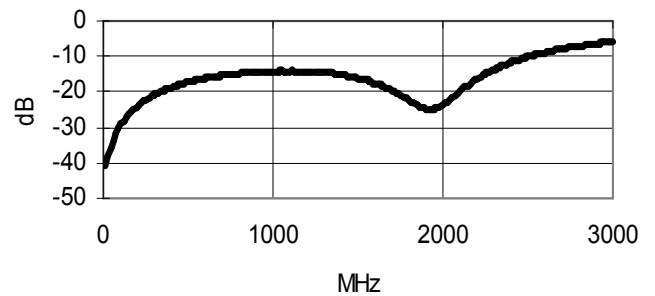

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
• **India** Tel: +91.80.43537383 • **China** Tel: +86.21.2407.1588
Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.


MABA-010125-TC1113



RF 1:1 Transmission Line Transformer
4.5-3000 MHz

Rev. V4

Tape & Reel Information

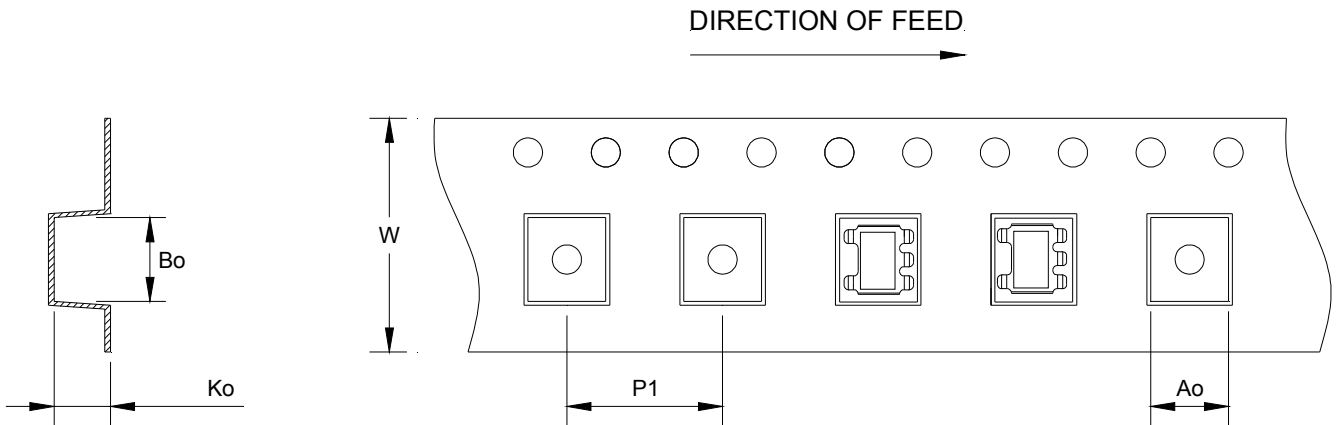

| Item | Dimension |
|------|------------------|
| Ao | 4.00mm +/-0.1mm |
| Bo | 4.00mm +/-0.1mm |
| Ko | 2.9mm +/-0.1mm |
| W | 12.00mm +/-0.3mm |
| P1 | 8.00mm +/-0.1mm |

Ordering Information

| Part Number | Package |
|--------------------|---------------------------------|
| MABA-010125-TC1113 | Tape and Reel (2000 piece Reel) |

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
 • **India** Tel: +91.80.43537383 • **China** Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[M/A-COM Technology Solutions:](#)

[MABA-010125-TC1113](#)