

# RF Power Field Effect Transistors

## N-Channel Enhancement-Mode Lateral MOSFETs

Designed for CDMA base station applications with frequencies from 2000 to 2700 MHz. Suitable for WiMAX, WiBro, BWA, and OFDM multicarrier Class AB and Class C amplifier applications.


- Typical Single-Carrier W-CDMA Performance:  $V_{DD} = 28$  Volts,  $I_{DQ} = 160$  mA,  $P_{out} = 3$  Watts Avg.,  $f = 2600$  MHz, Channel Bandwidth = 3.84 MHz, PAR = 8.5 dB @ 0.01% Probability on CCDF.  
 Power Gain — 14 dB  
 Drain Efficiency — 22%  
 ACPR @ 5 MHz Offset — -45 dBc in 3.84 MHz Channel Bandwidth
- Capable of Handling 5:1 VSWR, @ 28 Vdc, 2600 MHz, 15 Watts CW Output Power

### Features


- Characterized with Series Equivalent Large-Signal Impedance Parameters
- Internally Matched for Ease of Use
- Qualified Up to a Maximum of 32  $V_{DD}$  Operation
- Integrated ESD Protection
- 225°C Capable Plastic Package
- RoHS Compliant
- In Tape and Reel. R1 Suffix = 500 Units per 24 mm, 13 inch Reel.

**MRF6S27015NR1**  
**MRF6S27015GNR1**

**2300-2700 MHz, 3 W AVG., 28 V**  
**SINGLE W-CDMA**  
**LATERAL N-CHANNEL**  
**RF POWER MOSFETs**



**CASE 1265-09, STYLE 1**  
**TO-270-2**  
**PLASTIC**  
**MRF6S27015NR1**



**CASE 1265A-03, STYLE 1**  
**TO-270-2 GULL**  
**PLASTIC**  
**MRF6S27015GNR1**

**Table 1. Maximum Ratings**

| Rating                               | Symbol    | Value       | Unit |
|--------------------------------------|-----------|-------------|------|
| Drain-Source Voltage                 | $V_{DSS}$ | -0.5, +68   | Vdc  |
| Gate-Source Voltage                  | $V_{GS}$  | -0.5, +12   | Vdc  |
| Storage Temperature Range            | $T_{stg}$ | -65 to +150 | °C   |
| Case Operating Temperature           | $T_C$     | 150         | °C   |
| Operating Junction Temperature (1,2) | $T_J$     | 225         | °C   |

**Table 2. Thermal Characteristics**

| Characteristic   | Symbol          | Value (2,3) | Unit |
|--|-----------------|-------------|------|
| Thermal Resistance, Junction to Case<br>Case Temperature 80°C, 7.5 W Avg., Two-Tone<br>Case Temperature 79°C, 3 W CW | $R_{\theta JC}$ | 2.0<br>2.2  | °C/W |

1. Continuous use at maximum temperature will affect MTTF.
2. MTTF calculator available at <http://www.freescale.com/rf>. Select Software & Tools/Development Tools/Calculators to access MTTF calculators by product.
3. Refer to AN1955, *Thermal Measurement Methodology of RF Power Amplifiers*. Go to <http://www.freescale.com/rf>. Select Documentation/Application Notes - AN1955.

**Table 3. ESD Protection Characteristics**

| Test Methodology                      | Class        |
|---------------------------------------|--------------|
| Human Body Model (per JESD22-A114)    | 1A (Minimum) |
| Machine Model (per EIA/JESD22-A115)   | A (Minimum)  |
| Charge Device Model (per JESD22-C101) | IV (Minimum) |

**Table 4. Moisture Sensitivity Level**

| Test Methodology                      | Rating | Package Peak Temperature | Unit |
|---------------------------------------|--------|--------------------------|------|
| Per JESD 22-A113, IPC/JEDEC J-STD-020 | 3      | 260                      | °C   |

**Table 5. Electrical Characteristics** ( $T_C = 25^\circ\text{C}$  unless otherwise noted)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|----------------|--------|-----|-----|-----|------|
|----------------|--------|-----|-----|-----|------|

**Off Characteristics**

|   |           |   |   |     |                 |
|---|-----------|---|---|-----|-----------------|
| Zero Gate Voltage Drain Leakage Current<br>( $V_{DS} = 68\text{ Vdc}$ , $V_{GS} = 0\text{ Vdc}$ ) | $I_{DSS}$ | — | — | 10  | $\mu\text{Adc}$ |
| Zero Gate Voltage Drain Leakage Current<br>( $V_{DS} = 28\text{ Vdc}$ , $V_{GS} = 0\text{ Vdc}$ ) | $I_{DSS}$ | — | — | 1   | $\mu\text{Adc}$ |
| Gate-Source Leakage Current<br>( $V_{GS} = 5\text{ Vdc}$ , $V_{DS} = 0\text{ Vdc}$ )              | $I_{GSS}$ | — | — | 500 | nAdc            |

**On Characteristics**

|   |              |     |      |     |     |
|---|--------------|-----|------|-----|-----|
| Gate Threshold Voltage<br>( $V_{DS} = 10\text{ Vdc}$ , $I_D = 40\ \mu\text{Adc}$ )  | $V_{GS(th)}$ | 1.5 | 2.2  | 3.5 | Vdc |
| Gate Quiescent Voltage<br>( $V_{DS} = 28\text{ Vdc}$ , $I_D = 160\text{ mAdc}$ )  | $V_{GS(Q)}$  | —   | 2.8  | —   | Vdc |
| Fixture Gate Quiescent Voltage (1)<br>( $V_{DD} = 28\text{ Vdc}$ , $I_D = 160\text{ mAdc}$ , Measured in Functional Test) | $V_{GG(Q)}$  | 2.2 | 3.1  | 4.4 | Vdc |
| Drain-Source On-Voltage<br>( $V_{GS} = 10\text{ Vdc}$ , $I_D = 0.4\text{ Adc}$ )  | $V_{DS(on)}$ | —   | 0.27 | 0.4 | Vdc |


**Dynamic Characteristics (2)**

|   |           |   |      |   |    |
|---|-----------|---|------|---|----|
| Reverse Transfer Capacitance<br>( $V_{DS} = 28\text{ Vdc} \pm 30\text{ mV(rms)ac}$ @ 1 MHz, $V_{GS} = 0\text{ Vdc}$ ) | $C_{rss}$ | — | 11.6 | — | pF |
| Output Capacitance<br>( $V_{DS} = 28\text{ Vdc} \pm 30\text{ mV(rms)ac}$ @ 1 MHz, $V_{GS} = 0\text{ Vdc}$ )           | $C_{oss}$ | — | 22.9 | — | pF |

**Functional Tests (3)** (In Freescale Test Fixture, 50 ohm system)  $V_{DD} = 28\text{ Vdc}$ ,  $I_{DQ} = 160\text{ mA}$ ,  $P_{out} = 3\text{ W Avg.}$ ,  $f = 2600\text{ MHz}$ , Single-Carrier W-CDMA, 3.84 MHz Channel Bandwidth Carriers. ACPR measured in 3.84 MHz Channel Bandwidth @  $\pm 5\text{ MHz}$  Offset. PAR = 8.5 dB @ 0.01% Probability on CCDF.

|                              |          |      |     |     |     |
|------------------------------|----------|------|-----|-----|-----|
| Power Gain                   | $G_{ps}$ | 12.5 | 14  | 16  | dB  |
| Drain Efficiency             | $\eta_D$ | 19   | 22  | —   | %   |
| Adjacent Channel Power Ratio | ACPR     | —    | -45 | -42 | dBc |
| Input Return Loss            | IRL      | —    | -18 | -9  | dB  |

- $V_{GG} = 11/10 \times V_{GS(Q)}$ . Parameter measured on Freescale Test Fixture, due to resistive divider network on the board. Refer to Test Circuit schematic.
- Part internally input matched.
- Measurement made with device in straight lead configuration before any lead forming operation is applied.

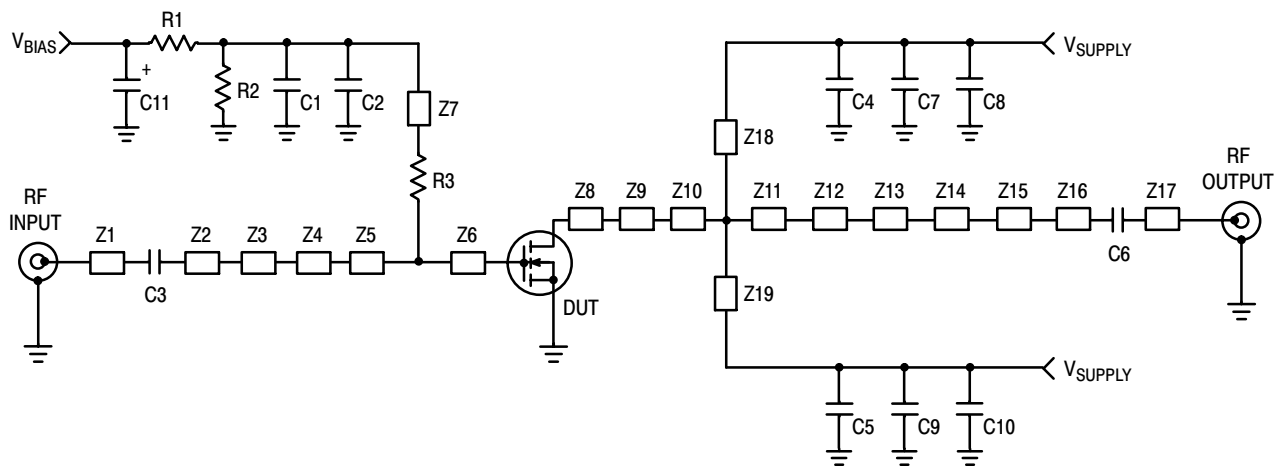

|     |                                |     |   |
|-----|--------------------------------|-----|---|
| Z1  | 0.503" x 0.066" Microstrip     | Z11 | 0.143" x 0.816" Microstrip                |
| Z2  | 0.905" x 0.066" Microstrip     | Z12 | 0.101" x 0.667" Microstrip                |
| Z3  | 0.371" x 0.300" x 0.049" Taper | Z13 | 0.073" x 0.485" Microstrip                |
| Z4  | 0.041" x 0.016" Microstrip     | Z14 | 0.120" x 0.021" Microstrip                |
| Z5  | 0.245" x 0.851" Microstrip     | Z15 | 0.407" x 0.170" Microstrip                |
| Z6  | 0.248" x 0.851" Microstrip     | Z16 | 0.714" x 0.066" Microstrip                |
| Z7  | 0.973" x 0.050" Microstrip     | Z17 | 0.496" x 0.066" Microstrip                |
| Z8  | 0.085" x 0.485" Microstrip     | Z18 | 0.475" x 0.050" Microstrip                |
| Z9  | 0.091" x 0.667" Microstrip     | Z19 | 0.480" x 0.050" Microstrip                |
| Z10 | 0.138" x 0.816" Microstrip     | PCB | Taconic RF-35, 0.030", $\epsilon_r = 3.5$ |

**Figure 1. MRF6S27015NR1(GNR1) Test Circuit Schematic**

**Table 6. MRF6S27015NR1(GNR1) Test Circuit Component Designations and Values**

| Part            | Description                              | Part Number        | Manufacturer |
|-----------------|--|--------------------|--------------|
| C1              | 100 nF Chip Capacitor                    | CDR33BX104AKYS     | Kemet        |
| C2              | 4.7 pF Chip Capacitor                    | ATC100B4R7BT500XT  | ATC          |
| C3              | 9.1 pF Chip Capacitor                    | ATC100B9R1BT500XT  | ATC          |
| C4, C5, C6      | 8.2 pF Chip Capacitors                   | ATC100B8R2BT500XT  | ATC          |
| C7, C8, C9, C10 | 10 $\mu$ F, 50 V Chip Capacitors         | GRM55DR61H106KA88L | Murata       |
| C11             | 10 $\mu$ F, 35 V Tantalum Chip Capacitor | T491D106K035AT     | Kemet        |
| R1              | 1 K $\Omega$ , 1/4 W Chip Resistor       | CRCW12061001FKEA   | Vishay       |
| R2              | 10 K $\Omega$ , 1/4 W Chip Resistor      | CRCW12061002FKEA   | Vishay       |
| R3              | 10 $\Omega$ , 1/4 W Chip Resistor        | CRCW120610R0FKEA   | Vishay       |



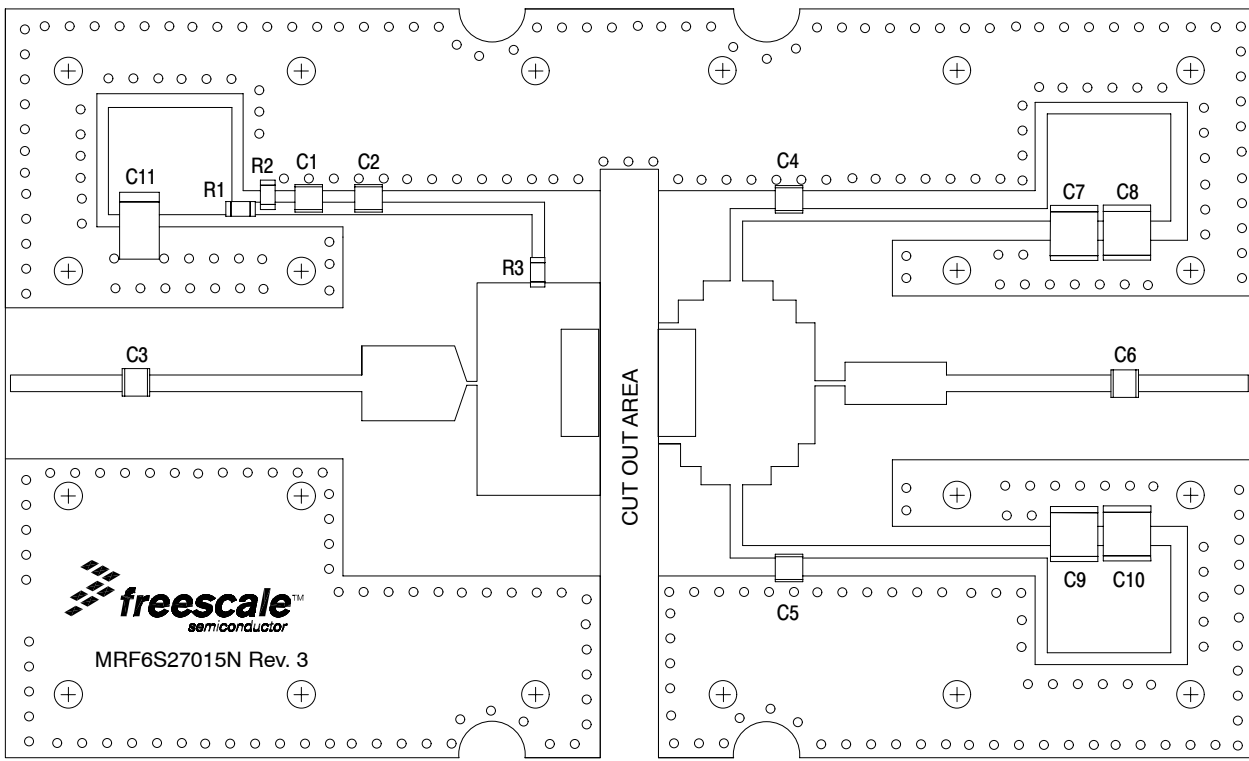


Figure 2. MRF6S27015NR1(GNR1) Test Circuit Component Layout


### TYPICAL CHARACTERISTICS

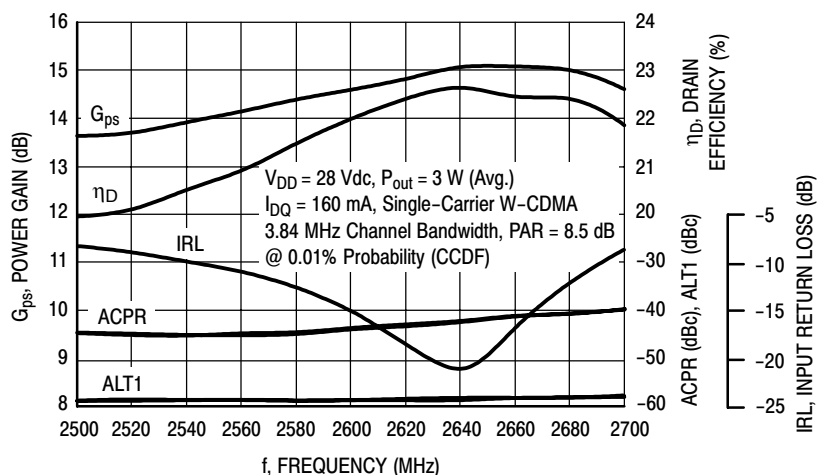


**Figure 3. Single-Carrier W-CDMA Broadband Performance @  $P_{out} = 3$  Watts Avg.**

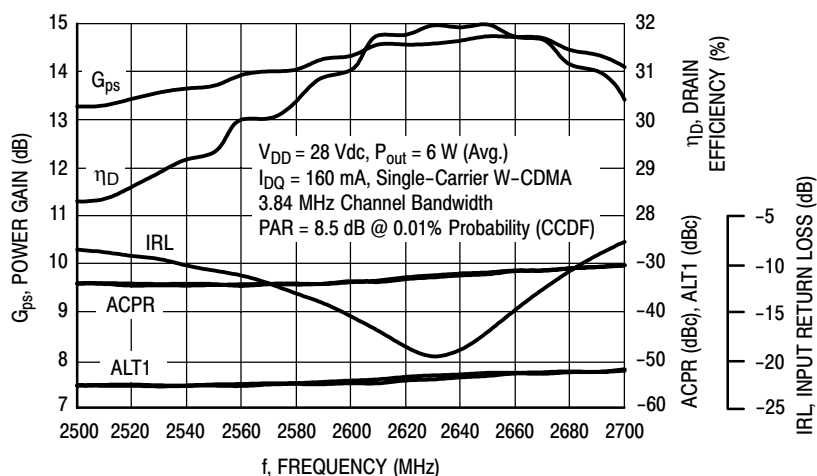

**Figure 4. Single-Carrier W-CDMA Broadband Performance @  $P_{out} = 6$  Watts Avg.**

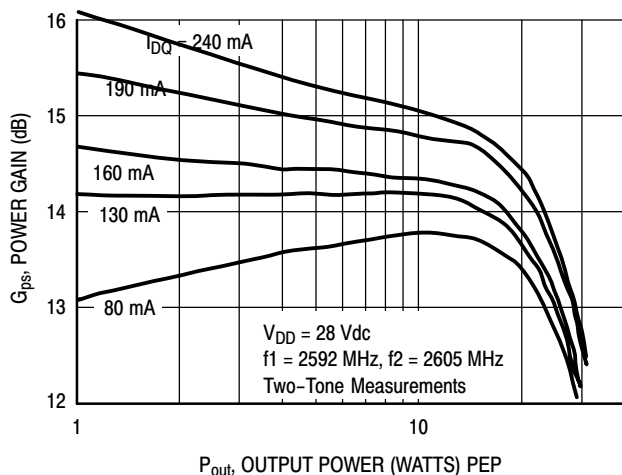


**Figure 5. Two-Tone Power Gain versus Output Power**

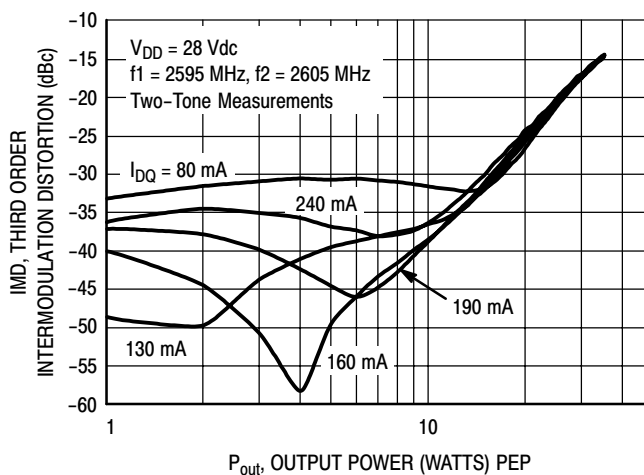


**Figure 6. Third Order Intermodulation Distortion versus Output Power**


### TYPICAL CHARACTERISTICS

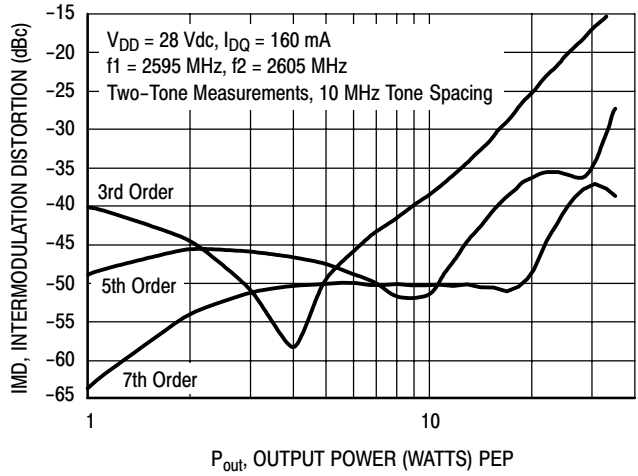


**Figure 7. Intermodulation Distortion Products versus Output Power**

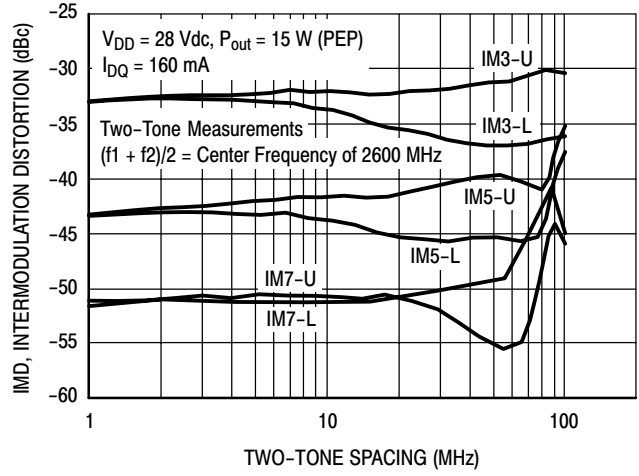

**Figure 8. Intermodulation Distortion Products versus Tone Spacing**

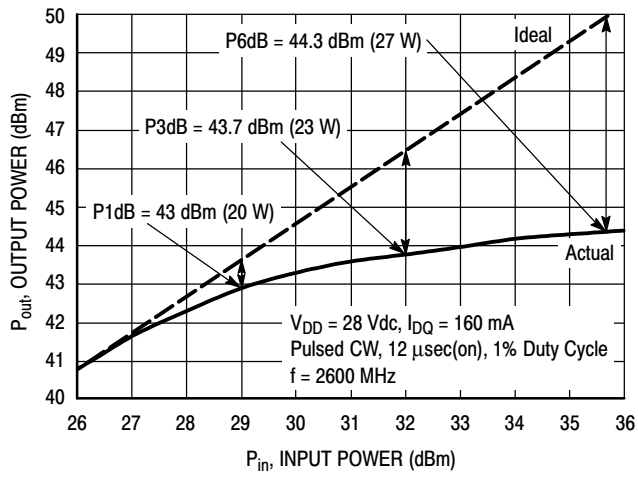


**Figure 9. Pulsed CW Output Power versus Input Power**

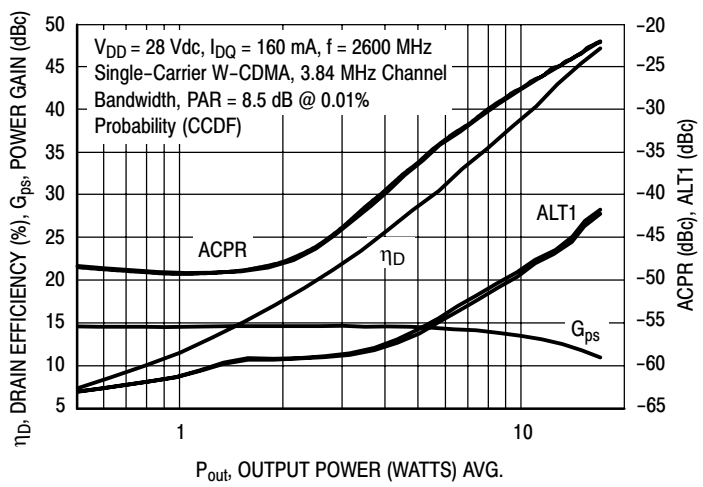


**Figure 10. Single-Carrier W-CDMA ACPR, ALT1, Power Gain and Drain Efficiency versus Output Power**


### TYPICAL CHARACTERISTICS

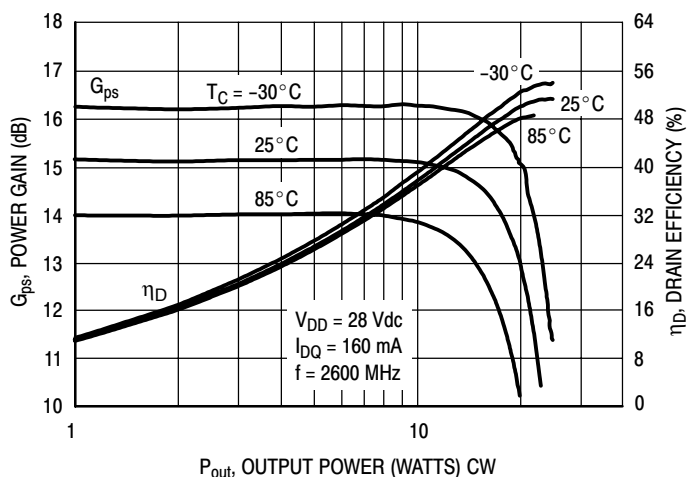


**Figure 11. Power Gain and Drain Efficiency versus CW Output Power**

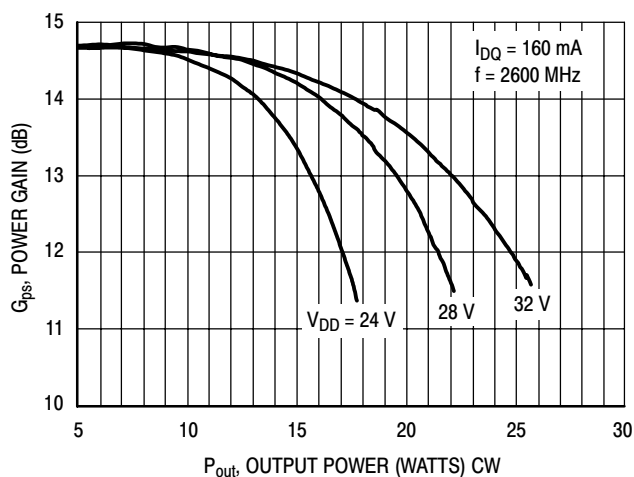

**Figure 12. Power Gain versus Output Power**

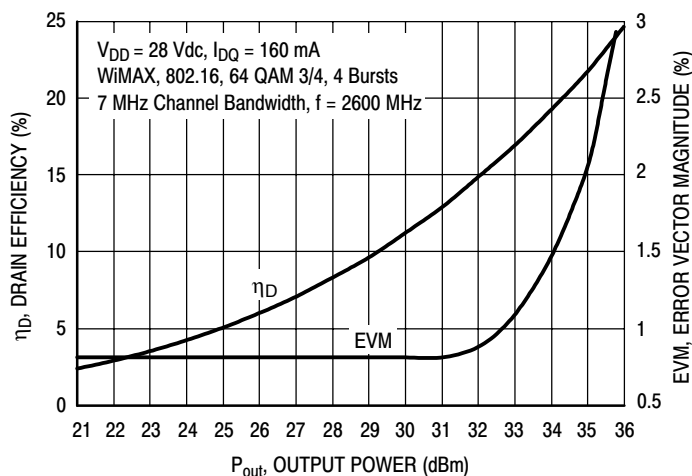

**Figure 13. Drain Efficiency and Error Vector Magnitude versus Output Power**

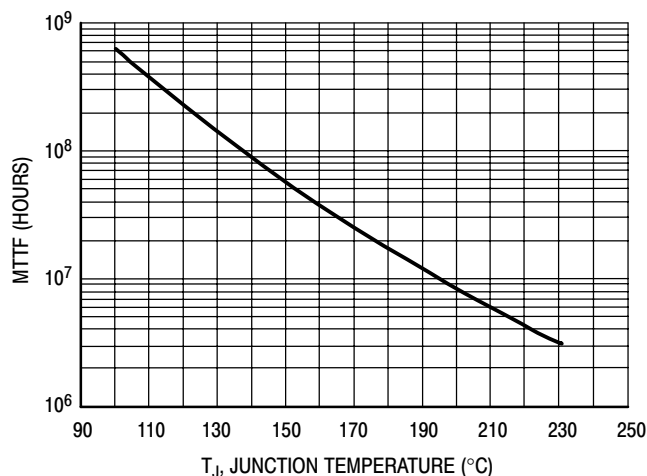


This above graph displays calculated MTTF in hours when the device is operated at  $V_{DD} = 28$  Vdc,  $P_{out} = 3$  W Avg., and  $\eta_D = 22\%$ .


MTTF calculator available at <http://www.freescale.com/rf>. Select Software & Tools/Development Tools/Calculators to access MTTF calculators by product.

**Figure 14. MTTF versus Junction Temperature**

### W-CDMA TEST SIGNAL

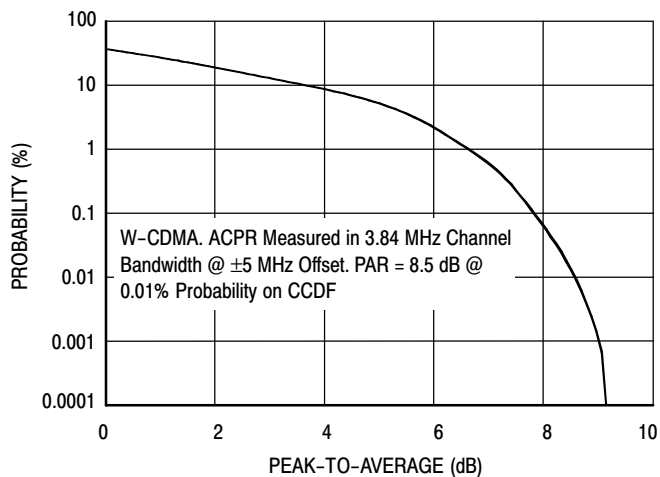


**Figure 15. CCDF W-CDMA 3GPP, Test Model 1, 64 DPCH, 67% Clipping, Single-Carrier Test Signal**

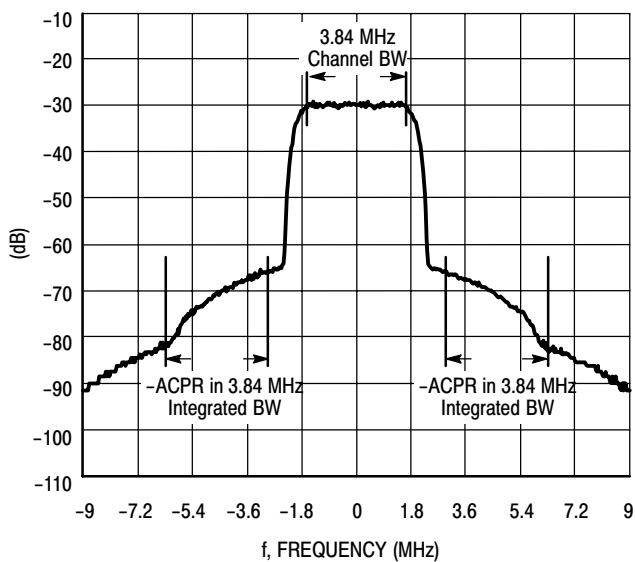

**Figure 16. Single-Carrier W-CDMA Spectrum**



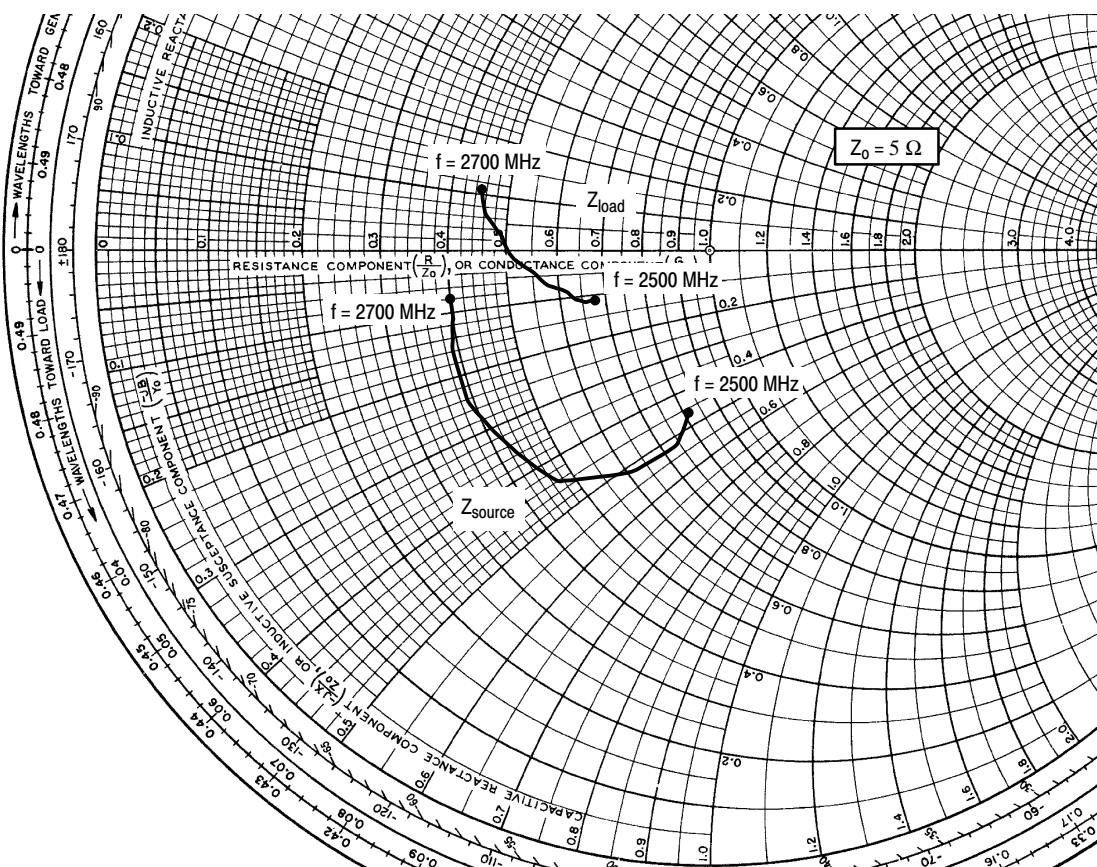

$V_{DD} = 28 \text{ Vdc}$ ,  $I_{DQ} = 160 \text{ mA}$ ,  $P_{out} = 3 \text{ W Avg.}$

| f<br>MHz | $Z_{source}$<br>$\Omega$ | $Z_{load}$<br>$\Omega$ |
|----------|--------------------------|------------------------|
| 2500     | $4.059 - j2.284$         | $3.380 - j0.543$       |
| 2525     | $3.679 - j2.593$         | $3.265 - j0.546$       |
| 2550     | $3.006 - j2.574$         | $3.077 - j0.449$       |
| 2575     | $2.355 - j2.190$         | $2.892 - j0.336$       |
| 2600     | $2.075 - j1.657$         | $2.727 - j0.182$       |
| 2625     | $1.930 - j1.179$         | $2.564 - j0.034$       |
| 2650     | $1.973 - j0.771$         | $2.435 + j0.140$       |
| 2675     | $2.017 - j0.557$         | $2.286 + j0.340$       |
| 2700     | $2.024 - j0.379$         | $2.227 + j0.538$       |

$Z_{source}$  = Test circuit impedance as measured from gate to ground.

$Z_{load}$  = Test circuit impedance as measured from drain to ground.

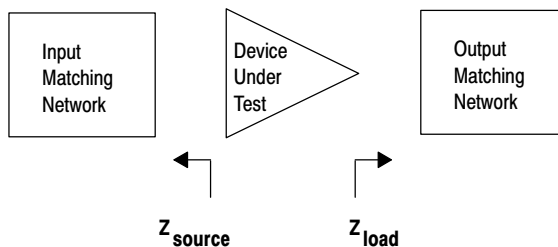


Figure 17. Series Equivalent Source and Load Impedance

**Table 7. Common Source Scattering Parameters** ( $V_{DD} = 28\text{ V}$ ,  $I_{DQ} = 160\text{ mA}$ ,  $T_C = 25^\circ\text{C}$ , 50 ohm system)



| f<br>MHz | $S_{11}$   |               | $S_{21}$   |               | $S_{12}$   |               | $S_{22}$   |               |
|----------|------------|---------------|------------|---------------|------------|---------------|------------|---------------|
|          | $ S_{11} $ | $\angle \phi$ | $ S_{21} $ | $\angle \phi$ | $ S_{12} $ | $\angle \phi$ | $ S_{22} $ | $\angle \phi$ |
| 500      | 0.984      | -178.2        | 1.453      | 39.2          | 0.001      | -109.8        | 0.870      | -122.3        |
| 550      | 0.984      | -179.0        | 1.180      | 36.5          | 0.000      | -121.0        | 0.888      | -127.6        |
| 600      | 0.986      | 180.0         | 0.958      | 34.4          | 0.000      | 159.6         | 0.901      | -132.0        |
| 650      | 0.987      | 179.0         | 0.776      | 33.0          | 0.001      | 118.4         | 0.911      | -135.8        |
| 700      | 0.987      | 178.1         | 0.627      | 32.3          | 0.001      | 106.5         | 0.921      | -139.1        |
| 750      | 0.986      | 177.3         | 0.502      | 32.5          | 0.001      | 104.2         | 0.931      | -142.1        |
| 800      | 0.985      | 176.5         | 0.397      | 34.1          | 0.002      | 96.0          | 0.940      | -144.8        |
| 850      | 0.985      | 175.8         | 0.308      | 37.7          | 0.002      | 95.6          | 0.944      | -147.3        |
| 900      | 0.984      | 175.1         | 0.235      | 44.5          | 0.003      | 94.0          | 0.951      | -149.5        |
| 950      | 0.983      | 174.5         | 0.180      | 56.5          | 0.003      | 91.2          | 0.956      | -151.5        |
| 1000     | 0.982      | 173.8         | 0.146      | 75.6          | 0.003      | 91.2          | 0.962      | -153.4        |
| 1050     | 0.981      | 173.2         | 0.142      | 98.9          | 0.004      | 89.9          | 0.965      | -155.2        |
| 1100     | 0.980      | 172.5         | 0.163      | 118.0         | 0.004      | 89.2          | 0.969      | -156.8        |
| 1150     | 0.978      | 171.9         | 0.199      | 129.9         | 0.005      | 88.9          | 0.973      | -158.3        |
| 1200     | 0.976      | 171.2         | 0.243      | 136.6         | 0.005      | 87.4          | 0.976      | -159.8        |
| 1250     | 0.974      | 170.5         | 0.291      | 140.2         | 0.006      | 86.5          | 0.980      | -161.1        |
| 1300     | 0.970      | 169.8         | 0.342      | 141.8         | 0.006      | 86.3          | 0.983      | -162.4        |
| 1350     | 0.966      | 169.0         | 0.395      | 142.1         | 0.006      | 84.6          | 0.986      | -163.7        |
| 1400     | 0.960      | 168.3         | 0.452      | 141.5         | 0.006      | 84.8          | 0.988      | -164.9        |
| 1450     | 0.953      | 167.5         | 0.514      | 140.2         | 0.007      | 86.9          | 0.990      | -166.1        |
| 1500     | 0.945      | 166.6         | 0.580      | 138.4         | 0.007      | 92.5          | 0.993      | -167.3        |
| 1550     | 0.933      | 165.8         | 0.655      | 135.9         | 0.009      | 100.3         | 0.992      | -168.4        |
| 1600     | 0.918      | 164.9         | 0.738      | 132.5         | 0.011      | 93.7          | 0.994      | -169.4        |
| 1650     | 0.901      | 164.1         | 0.828      | 128.4         | 0.013      | 83.6          | 0.996      | -170.4        |
| 1700     | 0.879      | 163.2         | 0.925      | 123.5         | 0.014      | 75.4          | 0.997      | -171.6        |
| 1750     | 0.850      | 162.5         | 1.030      | 117.6         | 0.014      | 69.1          | 0.998      | -172.8        |
| 1800     | 0.815      | 162.2         | 1.139      | 110.8         | 0.015      | 62.8          | 0.995      | -173.9        |
| 1850     | 0.775      | 162.5         | 1.246      | 102.7         | 0.016      | 55.8          | 0.991      | -175.0        |
| 1900     | 0.734      | 164.0         | 1.337      | 93.6          | 0.016      | 48.2          | 0.984      | -176.0        |
| 1950     | 0.700      | 167.0         | 1.399      | 83.5          | 0.015      | 40.3          | 0.976      | -176.9        |
| 2000     | 0.683      | 171.0         | 1.420      | 73.1          | 0.015      | 33.2          | 0.966      | -177.6        |
| 2050     | 0.687      | 175.1         | 1.396      | 62.9          | 0.014      | 26.5          | 0.957      | -178.0        |
| 2100     | 0.710      | 178.5         | 1.338      | 53.4          | 0.012      | 22.1          | 0.951      | -178.3        |
| 2150     | 0.741      | -179.3        | 1.259      | 45.0          | 0.011      | 19.8          | 0.948      | -178.6        |
| 2200     | 0.774      | -178.2        | 1.169      | 37.6          | 0.010      | 19.7          | 0.947      | -178.9        |
| 2250     | 0.805      | -177.8        | 1.079      | 31.1          | 0.009      | 19.7          | 0.947      | -179.2        |
| 2300     | 0.832      | -177.9        | 0.993      | 25.8          | 0.008      | 19.6          | 0.948      | -179.5        |
| 2350     | 0.855      | -178.2        | 0.917      | 21.2          | 0.007      | 22.6          | 0.950      | -179.9        |

(continued)


**Table 7. Common Source Scattering Parameters** ( $V_{DD} = 28\text{ V}$ ,  $I_{DQ} = 160\text{ mA}$ ,  $T_C = 25^\circ\text{C}$ , 50 ohm system) (continued)

| f<br>MHz | S <sub>11</sub> |        | S <sub>21</sub> |       | S <sub>12</sub> |      | S <sub>22</sub> |       |
|----------|-----------------|--------|-----------------|-------|-----------------|------|-----------------|-------|
|          | S <sub>11</sub> | ∠ φ    | S <sub>21</sub> | ∠ φ   | S <sub>12</sub> | ∠ φ  | S <sub>22</sub> | ∠ φ   |
| 2400     | 0.873           | -178.8 | 0.848           | 17.2  | 0.006           | 31.2 | 0.953           | 179.7 |
| 2450     | 0.887           | -179.4 | 0.786           | 13.7  | 0.006           | 42.2 | 0.955           | 179.2 |
| 2500     | 0.897           | -179.9 | 0.731           | 10.6  | 0.007           | 45.6 | 0.956           | 178.7 |
| 2550     | 0.907           | 179.6  | 0.682           | 7.9   | 0.007           | 46.5 | 0.957           | 178.2 |
| 2600     | 0.914           | 179.1  | 0.639           | 5.5   | 0.007           | 48.0 | 0.958           | 177.8 |
| 2650     | 0.919           | 178.8  | 0.600           | 3.3   | 0.007           | 47.0 | 0.960           | 177.2 |
| 2700     | 0.926           | 178.3  | 0.566           | 1.3   | 0.007           | 45.8 | 0.962           | 176.8 |
| 2750     | 0.931           | 177.9  | 0.534           | -0.6  | 0.006           | 52.1 | 0.964           | 176.2 |
| 2800     | 0.936           | 177.4  | 0.505           | -2.2  | 0.006           | 62.3 | 0.965           | 175.7 |
| 2850     | 0.940           | 177.0  | 0.480           | -3.8  | 0.006           | 69.8 | 0.966           | 175.2 |
| 2900     | 0.942           | 176.6  | 0.457           | -5.2  | 0.007           | 73.2 | 0.967           | 174.7 |
| 2950     | 0.945           | 176.3  | 0.436           | -6.5  | 0.007           | 78.7 | 0.968           | 174.2 |
| 3000     | 0.947           | 175.8  | 0.416           | -7.6  | 0.008           | 85.1 | 0.969           | 173.8 |
| 3050     | 0.949           | 175.6  | 0.399           | -8.7  | 0.009           | 87.9 | 0.969           | 173.2 |
| 3100     | 0.950           | 175.1  | 0.382           | -9.6  | 0.011           | 88.2 | 0.970           | 172.9 |
| 3150     | 0.953           | 174.8  | 0.368           | -10.5 | 0.012           | 86.9 | 0.972           | 172.6 |
| 3200     | 0.955           | 174.5  | 0.355           | -11.5 | 0.014           | 85.1 | 0.974           | 172.1 |

**PACKAGE DIMENSIONS**

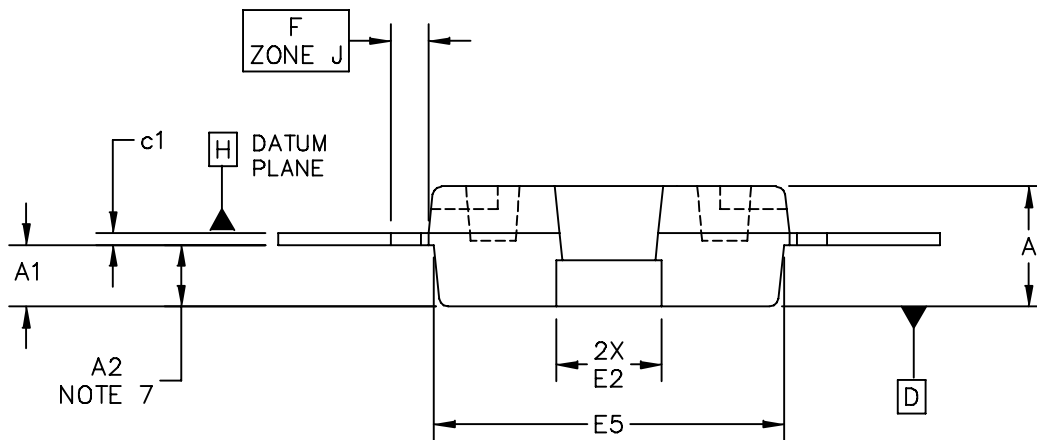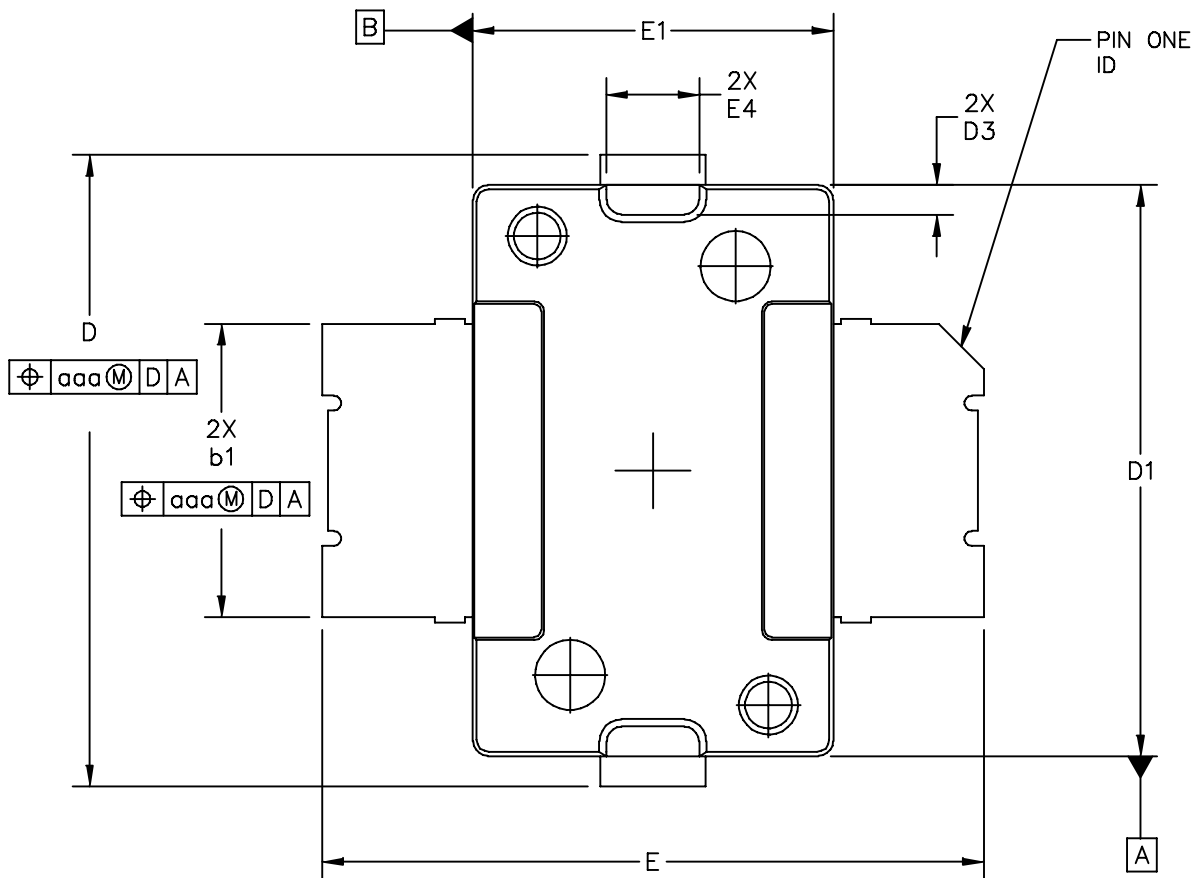

|   |                           |                            |  |
|---|---------------------------|----------------------------|--|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED. | MECHANICAL OUTLINE        | PRINT VERSION NOT TO SCALE |  |
| TITLE:<br>TO-270<br>SURFACE MOUNT                       | DOCUMENT NO: 98ASH98117A  | REV: K                     |  |
|   | CASE NUMBER: 1265-09      | 29 JUN 2007                |  |
|   | STANDARD: JEDEC TO-270 AA |                            |  |

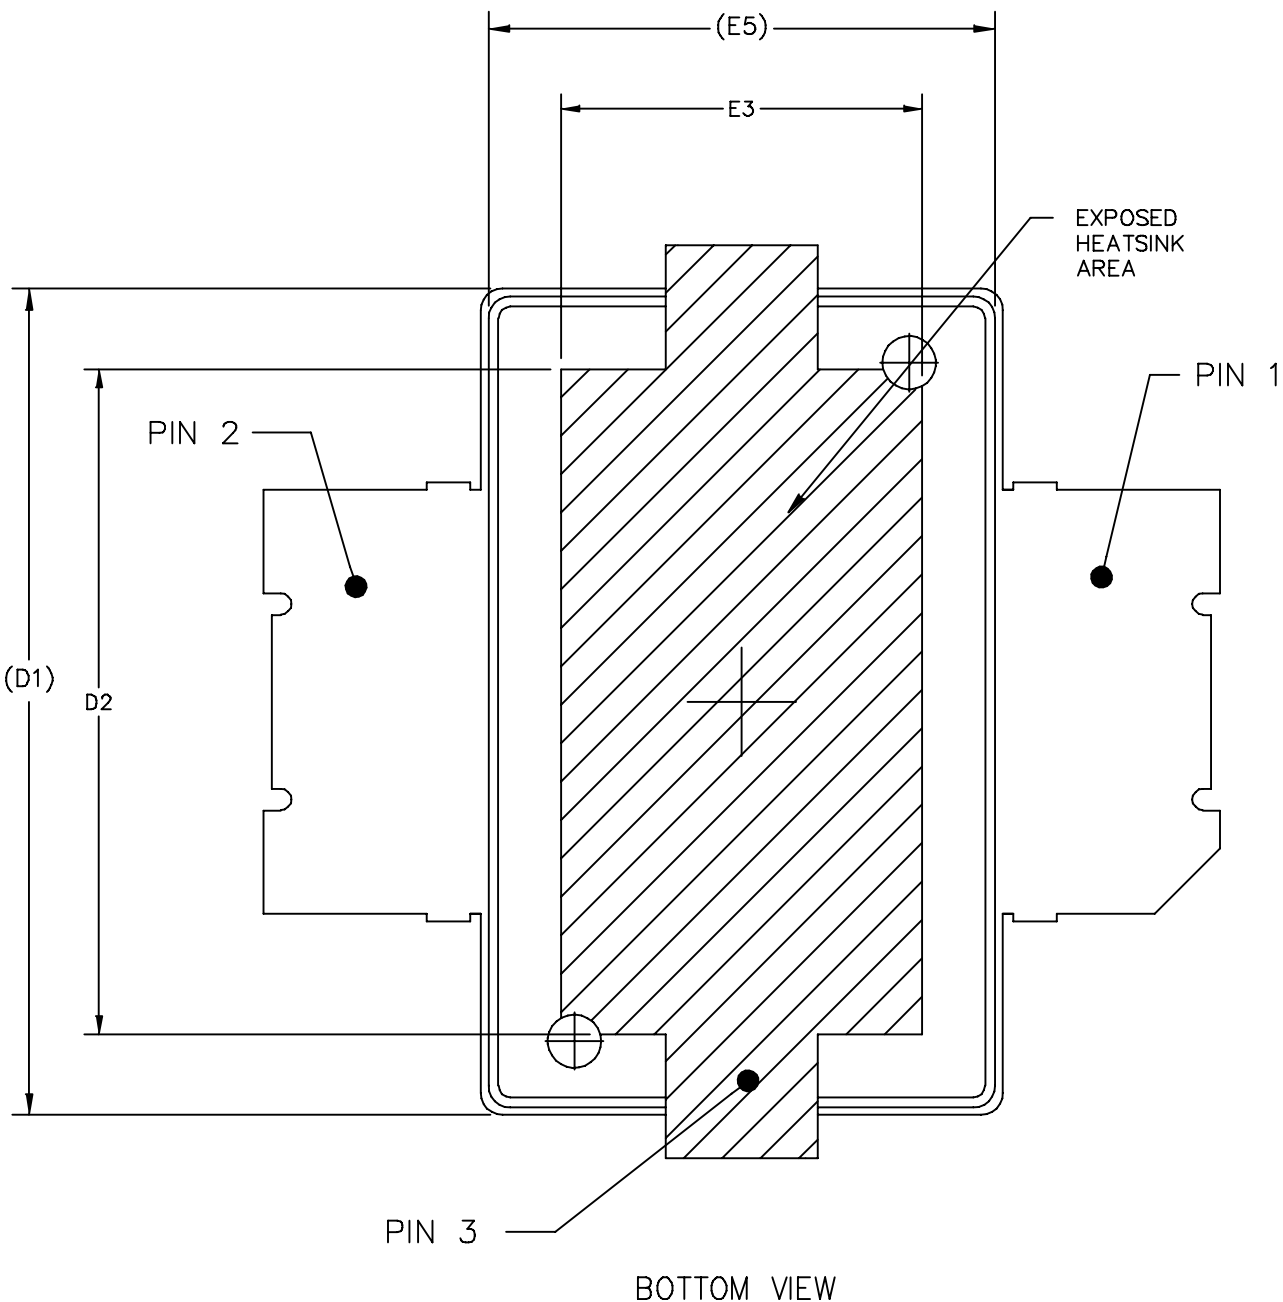

|  |                           |                            |             |
|--|---------------------------|----------------------------|-------------|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED.  | MECHANICAL OUTLINE        | PRINT VERSION NOT TO SCALE |             |
| TITLE:<br><div style="text-align: center; padding: 5px;"> <b>TO-270<br/>SURFACE MOUNT</b> </div> | DOCUMENT NO: 98ASH98117A  |                            | REV: K      |
|  | CASE NUMBER: 1265-09      |                            | 29 JUN 2007 |
|  | STANDARD: JEDEC TO-270 AA |                            |             |



NOTES:

1. CONTROLLING DIMENSION: INCH
2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.
3. DATUM PLANE -H- IS LOCATED AT TOP OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE TOP OF THE PARTING LINE.
4. DIMENSIONS "D1" AND "E1" DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS .006 PER SIDE. DIMENSIONS "D1" AND "E1" DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -H-.
5. DIMENSION "b1" DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE .005 TOTAL IN EXCESS OF THE "b1" DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. DATUMS -A- AND -B- TO BE DETERMINED AT DATUM PLANE -H-.
7. DIMENSION "A2" APPLIES WITHIN ZONE "J" ONLY.
8. DIMENSIONS "D" AND "E2" DO NOT INCLUDE MOLD PROTRUSION. OVERALL LENGTH INCLUDING MOLD PROTRUSION SHOULD NOT EXCEED 0.430 INCH FOR DIMENSION "D" AND 0.080 INCH FOR DIMENSION "E2". DIMENSIONS "D" AND "E2" DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -D-.


STYLE 1:  
 PIN 1 - DRAIN  
 PIN 2 - GATE  
 PIN 3 - SOURCE

| DIM | INCH |      | MILLIMETER |       | DIM | INCH     |      | MILLIMETER |      |
|-----|------|------|------------|-------|-----|----------|------|------------|------|
|     | MIN  | MAX  | MIN        | MAX   |     | MIN      | MAX  | MIN        | MAX  |
| A   | .078 | .082 | 1.98       | 2.08  | F   | .025 BSC |      | 0.64 BSC   |      |
| A1  | .039 | .043 | 0.99       | 1.09  | b1  | .193     | .199 | 4.90       | 5.06 |
| A2  | .040 | .042 | 1.02       | 1.07  | c1  | .007     | .011 | 0.18       | 0.28 |
| D   | .416 | .424 | 10.57      | 10.77 | aaa | .004     |      | 0.10       |      |
| D1  | .378 | .382 | 9.60       | 9.70  |     |          |      |            |      |
| D2  | .290 | ---- | 7.37       | ----  |     |          |      |            |      |
| D3  | .016 | .024 | 0.41       | 0.61  |     |          |      |            |      |
| E   | .436 | .444 | 11.07      | 11.28 |     |          |      |            |      |
| E1  | .238 | .242 | 6.04       | 6.15  |     |          |      |            |      |
| E2  | .066 | .074 | 1.68       | 1.88  |     |          |      |            |      |
| E3  | .150 | ---- | 3.81       | ----  |     |          |      |            |      |
| E4  | .058 | .066 | 1.47       | 1.68  |     |          |      |            |      |
| E5  | .231 | .235 | 5.87       | 5.97  |     |          |      |            |      |

|   |  |                    |                           |                            |             |
|---|--|--------------------|---------------------------|----------------------------|-------------|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED. |  | MECHANICAL OUTLINE |                           | PRINT VERSION NOT TO SCALE |             |
| TITLE:<br><br>TO-270<br>SURFACE MOUNT                   |  |                    | DOCUMENT NO: 98ASH98117A  |                            | REV: K      |
|   |  |                    | CASE NUMBER: 1265-09      |                            | 29 JUN 2007 |
|   |  |                    | STANDARD: JEDEC TO-270 AA |                            |             |

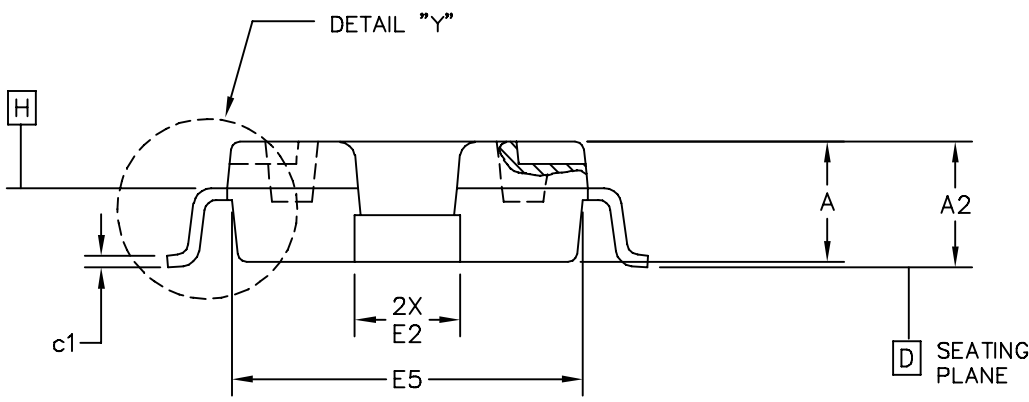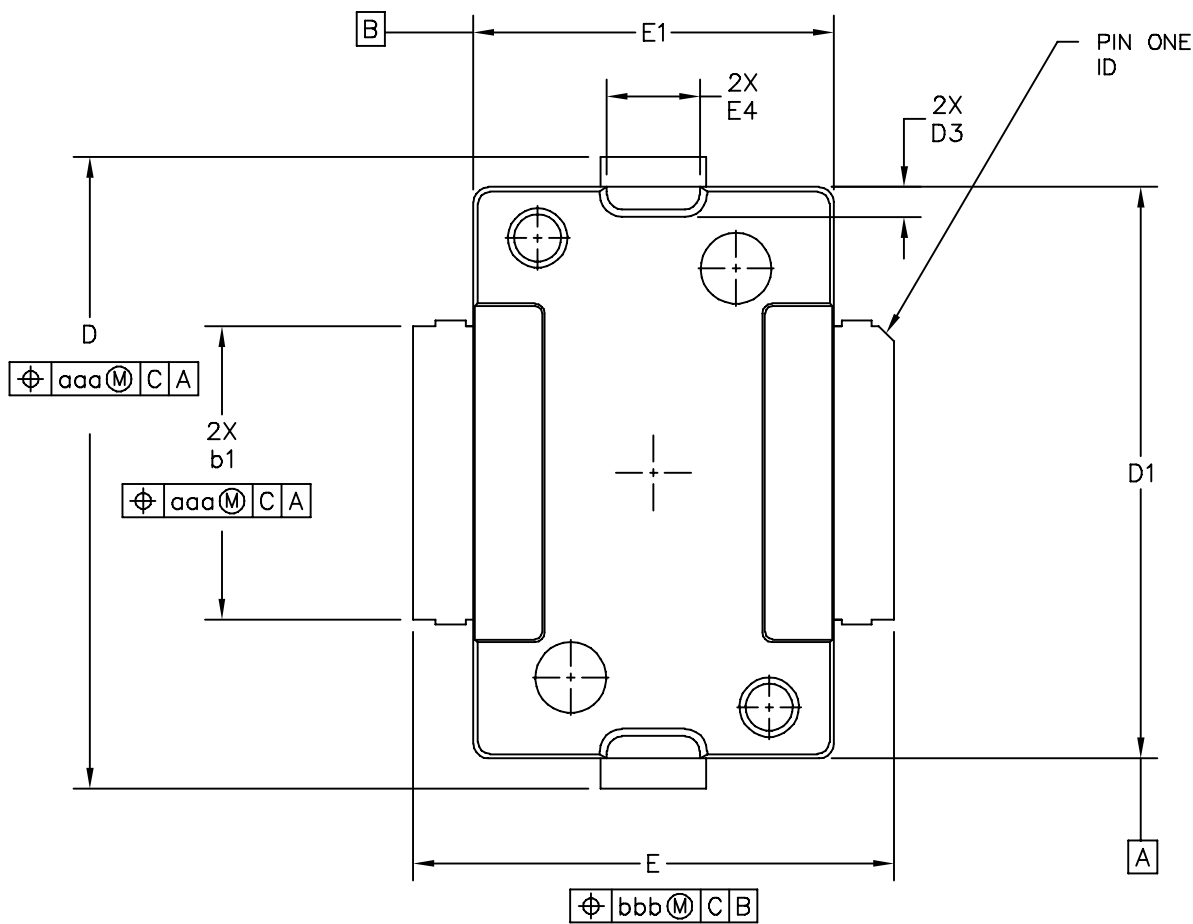

|   |  |                           |  |                            |  |
|---|--|---------------------------|--|----------------------------|--|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED. |  | <b>MECHANICAL OUTLINE</b> |  | PRINT VERSION NOT TO SCALE |  |
| TITLE:<br><br>TO-270<br>GULL WING                       |  | DOCUMENT NO: 98ASA99301D  |  | REV: C                     |  |
|   |  | CASE NUMBER: 1265A-03     |  | 02 JUL 2007                |  |
|   |  | STANDARD: JEDEC TO-270 BA |  |                            |  |

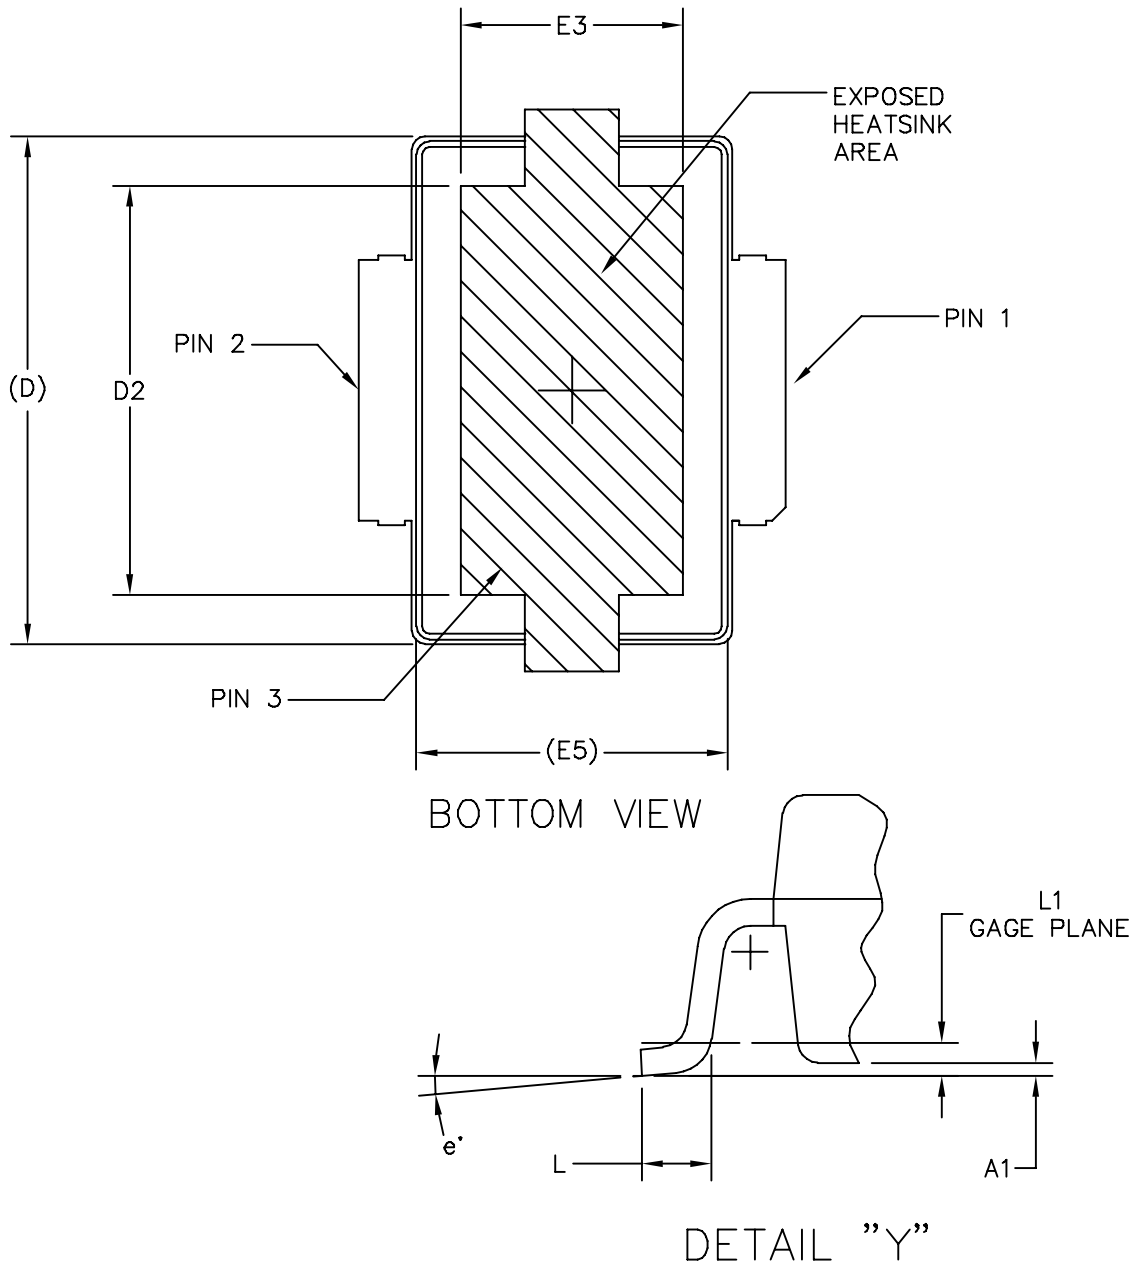

|   |                           |                            |             |
|---|---------------------------|----------------------------|-------------|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED.                                       | <b>MECHANICAL OUTLINE</b> | PRINT VERSION NOT TO SCALE |             |
| TITLE:<br><div style="text-align: center; padding: 10px;"> <b>TO-270<br/>GULL WING</b> </div> | DOCUMENT NO: 98ASA99301D  |                            | REV: C      |
|   | CASE NUMBER: 1265A-03     |                            | 02 JUL 2007 |
|   | STANDARD: JEDEC TO-270 BA |                            |             |



NOTES:

1. CONTROLLING DIMENSION: INCH
2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.
3. DATUM PLANE -H- IS LOCATED AT TOP OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE TOP OF THE PARTING LINE.
4. DIMENSIONS "D1" AND "E1" DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS .006 PER SIDE. DIMENSIONS "D1 AND "E1" DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -H-.
5. DIMENSION b1 DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE .005 TOTAL IN EXCESS OF THE b1 DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. DATUMS -A- AND -B- TO BE DETERMINED AT DATUM PLANE -H-.
7. DIMENSIONS "D" AND "E2" DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS .003 PER SIDE. DIMENSIONS "D AND "E2" DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -D-.

STYLE 1:

- PIN 1 - DRAIN
- PIN 2 - GATE
- PIN 3 - SOURCE

| DIM   | INCH |      | MILLIMETER                |       | DIM                       | INCH                       |      | MILLIMETER  |      |
|---|------|------|---------------------------|-------|---------------------------|----------------------------|------|-------------|------|
|   | MIN  | MAX  | MIN                       | MAX   |                           | MIN                        | MAX  | MIN         | MAX  |
| A   | .078 | .082 | 1.98                      | 2.08  | L                         | .018                       | .024 | 0.46        | 0.61 |
| A1  | .001 | .004 | 0.02                      | 0.10  | L1                        | .01 BSC                    |      | 0.25 BSC    |      |
| A2  | .077 | .088 | 1.96                      | 2.24  | b1                        | .193                       | .199 | 4.90        | 5.06 |
| D   | .416 | .424 | 10.57                     | 10.77 | c1                        | .007                       | .011 | 0.18        | 0.28 |
| D1  | .378 | .382 | 9.60                      | 9.70  | e                         | 2'                         | 8'   | 2'          | 8'   |
| D2  | .290 | -    | 7.37                      | -     | aaa                       | .004                       |      | 0.10        |      |
| D3  | .016 | .024 | 0.41                      | 0.61  |                           |                            |      |             |      |
| E   | .316 | .324 | 8.03                      | 8.23  |                           |                            |      |             |      |
| E1  | .238 | .242 | 6.04                      | 6.15  |                           |                            |      |             |      |
| E2  | .066 | .074 | 1.68                      | 1.88  |                           |                            |      |             |      |
| E3  | .150 | -    | 3.81                      | -     |                           |                            |      |             |      |
| E4  | .058 | .066 | 1.47                      | 1.68  |                           |                            |      |             |      |
| E5  | .231 | .235 | 5.87                      | 5.97  |                           |                            |      |             |      |
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED. |      |      | <b>MECHANICAL OUTLINE</b> |       |                           | PRINT VERSION NOT TO SCALE |      |             |      |
| TITLE:<br><br>TO-270<br>GULL WING                       |      |      |                           |       | DOCUMENT NO: 98ASA99301D  |                            |      | REV: C      |      |
|   |      |      |                           |       | CASE NUMBER: 1265A-03     |                            |      | 02 JUL 2007 |      |
|   |      |      |                           |       | STANDARD: JEDEC TO-270 BA |                            |      |             |      |

## PRODUCT DOCUMENTATION

Refer to the following documents to aid your design process.

### Application Notes

- AN1907: Solder Reflow Attach Method for High Power RF Devices in Plastic Packages
- AN1955: Thermal Measurement Methodology of RF Power Amplifiers

### Engineering Bulletins

- EB212: Using Data Sheet Impedances for RF LDMOS Devices

## REVISION HISTORY

The following table summarizes revisions to this document.

| Revision | Date      | Description   |
|----------|-----------|---|
| 0        | Aug. 2006 | <ul style="list-style-type: none"> <li>• Initial Release of Data Sheet</li> </ul>   |
| 1        | June 2007 | <ul style="list-style-type: none"> <li>• Added Case Operating Temperature limit to the Maximum Ratings table and set limit to 150°C, p. 1</li> <li>• Operating Junction Temperature increased from 200°C to 225°C in Maximum Ratings table, related “Continuous use at maximum temperature will affect MTTF” footnote added and changed 200°C to 225°C in Capable Plastic Package bullet, p. 1</li> <li>• Removed footnote and “Measured in Functional Test” from the RF test condition voltage callout for <math>V_{GS(Q)}</math>, and added Fixture Gate Quiescent Voltage, <math>V_{GG(Q)}</math> to On Characteristics table, p. 2</li> <li>• <math>V_{DS(on)}</math> Typ and Min values corrected in On Characteristics table, p. 2</li> <li>• Output Capacitance Typ value corrected in Dynamic Characteristics table, p. 2</li> <li>• Updated Part Numbers in Table 6, Component Designations and Values, to RoHS compliant part numbers, p. 3</li> <li>• Replaced Fig. 14, MTTF versus Junction Temperature with updated graph. Removed Amps<sup>2</sup> and listed operating characteristics and location of MTTF calculator for device, p. 7</li> <li>• Fig. 15, CCDF W-CDMA 3GPP, Test Model 1, 64 DPCH, 50% Clipping, Single-Carrier Test Signal, updated to remove IM3 measurement copy from callout in graph, p. 8</li> <li>• Updated Fig. 16, Single-Carrier W-CDMA Spectrum, to correctly reflect integrated bandwidth offsets, p. 8</li> </ul> |
| 2        | Dec. 2008 | <ul style="list-style-type: none"> <li>• Changed Typical Performance Full Frequency Band to <math>f = 2600</math> MHz to match Functional Test specification, p. 1</li> <li>• Changed Storage Temperature Range in Max Ratings table from -65 to +175 to -65 to +150 for standardization across products, p. 1</li> <li>• Replaced Case Outline 1265-08 with 1265-09, Issue K, p. 1, 12-14. Corrected cross hatch pattern in bottom view and changed its dimensions (D2 and E3) to minimum value on source contact (D2 changed from Min-Max .290-.320 to .290 Min; E3 changed from Min-Max .150-.180 to .150 Min). Added JEDEC Standard Package Number.</li> <li>• Replaced Case Outline 1265A-02 with 1265A-03, Issue C, p. 1, 15-17. Corrected cross hatch pattern and its dimensions (D2 and E2) on source contact (D2 changed from Min-Max .290-.320 to .290 Min; E3 changed from Min-Max .150-.180 to .150 Min). Added pin numbers. Corrected mm dimension L for gull-wing foot from 4.90-5.06 Min-Max to 0.46-0.61 Min-Max. Added JEDEC Standard Package Number.</li> <li>• Added footnote, Measurement made with device in straight lead configuration before any lead forming operation is applied, to Functional Tests table, p. 2.</li> <li>• Updated Part Numbers in Table 6, Component Designations and Values, to latest RoHS compliant part numbers, p. 3</li> </ul>  |

## **How to Reach Us:**

### **Home Page:**

[www.freescale.com](http://www.freescale.com)

### **Web Support:**

<http://www.freescale.com/support>

### **USA/Europe or Locations Not Listed:**

Freescale Semiconductor, Inc.  
Technical Information Center, EL516  
2100 East Elliot Road  
Tempe, Arizona 85284  
1-800-521-6274 or +1-480-768-2130  
[www.freescale.com/support](http://www.freescale.com/support)

### **Europe, Middle East, and Africa:**

Freescale Halbleiter Deutschland GmbH  
Technical Information Center  
Schatzbogen 7  
81829 Muenchen, Germany  
+44 1296 380 456 (English)  
+46 8 52200080 (English)  
+49 89 92103 559 (German)  
+33 1 69 35 48 48 (French)  
[www.freescale.com/support](http://www.freescale.com/support)

### **Japan:**

Freescale Semiconductor Japan Ltd.  
Headquarters  
ARCO Tower 15F  
1-8-1, Shimo-Meguro, Meguro-ku,  
Tokyo 153-0064  
Japan  
0120 191014 or +81 3 5437 9125  
[support.japan@freescale.com](mailto:support.japan@freescale.com)

### **Asia/Pacific:**

Freescale Semiconductor China Ltd.  
Exchange Building 23F  
No. 118 Jianguo Road  
Chaoyang District  
Beijing 100022  
China  
+86 10 5879 8000  
[support.asia@freescale.com](mailto:support.asia@freescale.com)

### **For Literature Requests Only:**

Freescale Semiconductor Literature Distribution Center  
P.O. Box 5405  
Denver, Colorado 80217  
1-800-441-2447 or +1-303-675-2140  
Fax: +1-303-675-2150  
[LDCForFreescaleSemiconductor@hibbertgroup.com](mailto:LDCForFreescaleSemiconductor@hibbertgroup.com)

Information in this document is provided solely to enable system and software implementers to use Freescale Semiconductor products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Freescale Semiconductor reserves the right to make changes without further notice to any products herein. Freescale Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Freescale Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in Freescale Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals", must be validated for each customer application by customer's technical experts. Freescale Semiconductor does not convey any license under its patent rights nor the rights of others. Freescale Semiconductor products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Freescale Semiconductor product could create a situation where personal injury or death may occur. Should Buyer purchase or use Freescale Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold Freescale Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Freescale Semiconductor was negligent regarding the design or manufacture of the part.

Freescale™ and the Freescale logo are trademarks of Freescale Semiconductor, Inc. All other product or service names are the property of their respective owners.

© Freescale Semiconductor, Inc. 2006-2008. All rights reserved.