

< High-power GaAs FET (small signal gain stage) >

MGF2430A

L to Ku BAND / 1.1W

non - matched

DESCRIPTION

The MGF2430A, GaAs FET with an N-channel schottky gate, is designed for L to Ku band amplifiers.

FEATURES

- High output power
P1dB=30.5dBm(T.Y.P) @f=14.5GHz
- High linear gain
GLP=6.5dB(TYP.) @f=14.5GHz
- High power added efficiency
P.A.E=27%(TYP.) @f=14.5GHz,P1dB
- Hermetically sealed metal package

APPLICATION

- For L to Ku band power amplifiers

QUALITY

- IG

RECOMMENDED BIAS CONDITIONS

- Vds=10V
- Ids=300mA
- Rg=500Ω

Absolute maximum ratings (Ta=25°C)

Symbol	Parameter	Ratings	Unit
VGDO	Gate to Source Voltage	-15	V
VGSO	Gate to source voltage	-15	V
IDSS	Saturated drain current	800	mA
IGR	Reverse gate current	-2.4	mA
IGF	Forward gate current	10	mA
PT*1	Total power dissipation	5	W
Tch	Channel temperature	175	°C
Tstg	Storage temperature	-65 to +175	°C

*1:Tc=25°C


Electrical characteristics (Ta=25°C)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
IDSS	Saturated drain current	VDS=3V, VGS=0V	400	600	800	mA
gm	Transconductance	VDS=3V, ID=300mA	200	260	-	mS
VGS(off)	Gate to source cut-off voltage	VDS=3V, ID=2mA	-1	-2.5	-4.0	V
P1dB	1dB gain compression power	VDS=10V, ID(RF off)=300mA	29	30.5	-	dBm
GLP *2	Linear power gain	f=14.5GHz	5.5	6.5	-	dB
P.A.E	Power added efficiency	*2 : Pin=15dBm		27	-	%
Rth(ch-c) *3	Thermal resistance	Δ Vf method	-	-	30	°C/W

*3 :Channel-case

OUTLINE DRAWING

Unit : millimeters

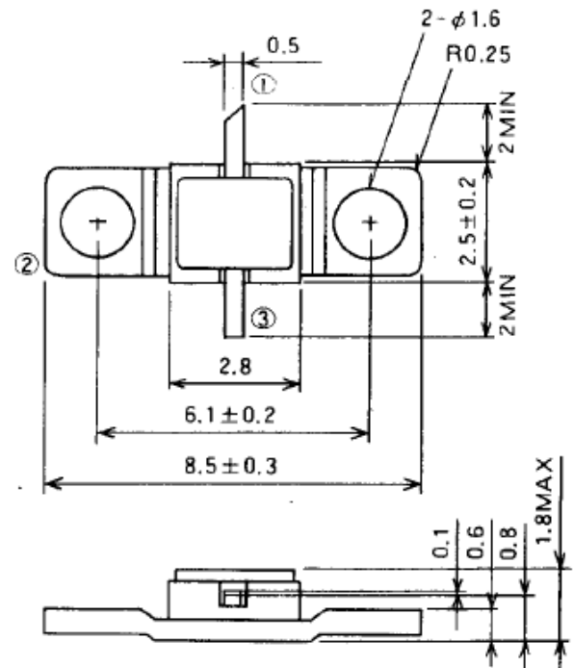

GF-17

① GATE
② SOURCE
③ DRAIN


< High-power GaAs FET (small signal gain stage) >

MGF2430A


L to Ku BAND / 1.1W

non - matched

MGF2430A TYPICAL CHARACTERISTICS (Ta=25deg.C)

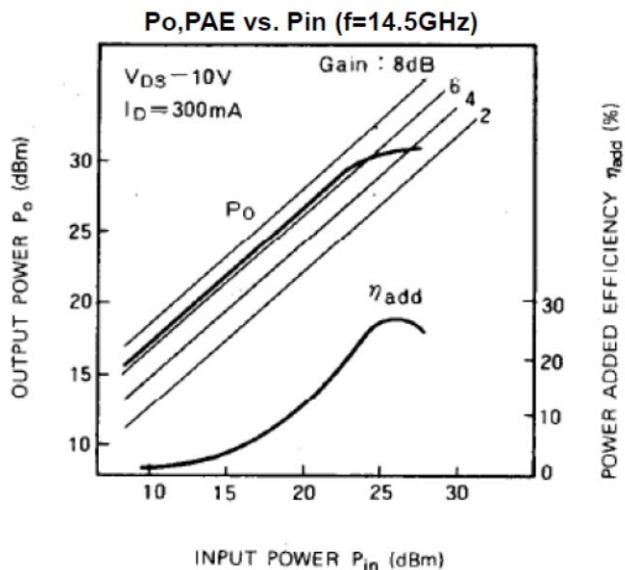

MGF2430A S-parameters (Ta=25deg.C, VDS=10(V), IDS=300mA)

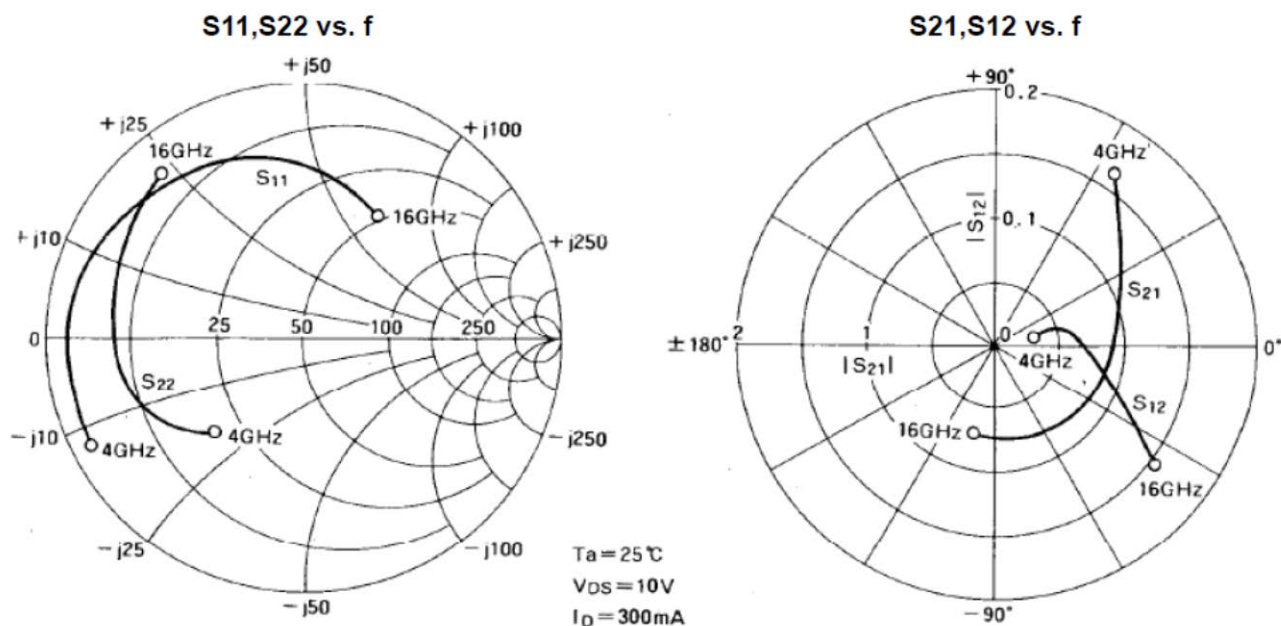

f (GHz)	S Parameters(Typ.)									
	S11		S21		S12		S22		K	MSG/MAG
	Magn.	Angle(deg.)	Magn.	Angle(deg.)	Magn.	Angle(deg.)	Magn.	Angle(deg.)	-	dB
4	0.934	-153.0	1.641	57.0	0.030	18.0	0.513	-132.0	0.501	17.4
6	0.900	-168.0	1.109	34.0	0.035	19.0	0.620	-142.0	0.969	15.0
8	0.853	173.0	0.927	13.0	0.043	20.0	0.699	-161.5	0.811	13.3
10	0.813	153.0	0.830	-13.0	0.052	18.5	0.723	180.0	1.008	11.5
12	0.750	131.5	0.788	-41.0	0.058	13.0	0.754	162.0	1.331	7.9
14	0.790	105.0	0.730	-69.0	0.083	-7.5	0.783	146.0	1.108	7.4
16	0.530	61.0	0.689	-104.0	0.153	-37.0	0.836	132.0	0.681	6.5

Publication Date : Dec., 2014

CSTG-16265

MITSUBISHI ELECTRIC CORPORATION

MGF2430A

L to Ku BAND / 1.1W

non - matched

Keep safety first in your circuit designs!

Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of non-flammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

- These materials are intended as a reference to assist our customers in the selection of the Mitsubishi semiconductor product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Mitsubishi Electric Corporation or a third party.
- Mitsubishi Electric Corporation assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
- All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Mitsubishi Electric Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor for the latest product information before purchasing a product listed herein.

The information described here may contain technical inaccuracies or typographical errors. Mitsubishi Electric Corporation assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.

Please also pay attention to information published by Mitsubishi Electric Corporation by various means, including the Mitsubishi Semiconductor home page (<http://www.MitsubishiElectric.com/>).

- When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Mitsubishi Electric Corporation assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
- Mitsubishi Electric Corporation semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
- The prior written approval of Mitsubishi Electric Corporation is necessary to reprint or reproduce in whole or in part these materials.
- If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.
Any diversion or re-export contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
- Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor for further details on these materials or the products contained therein.